



DORO

LIGHTING SOLUTIONS

INDOOR

CATALOG 2026

At DORO Lighting Solutions, we are more than just a lighting brand — we are a reflection of passion, creativity, and intention. We believe in the transformative power of light and its ability to uplift spaces and spirits. With curiosity as our compass and innovation as our guide, we embrace each challenge as an opportunity to evolve, glow brighter, and spread that brilliance to the world around us.

We proudly celebrate our journey in lighting—rooted in purpose, shaped by experience, and inspired by the future.

**CRAFTED BY PASSION,
GLOWING WITH MEANING.**

T
Z
W
T
Z

T
Z
W
T
Z

T
Z
W
T
Z

T
Z
W
T
Z

O

O

O

O

C

C

C

C

- 01** | **RECESSED PIN SPOT LIGHT**
- 02** | **TRACK SYSTEM**
- 03** | **RECESSED SPOT LIGHT**
- 04** | **TRIMLESS SPOT LIGHT**
- 05** | **LAZER SPOT LIGHT**
- 06** | **FRAME PROJECTOR LIGHT**
- 07** | **LED DOWN LIGHT**
- 08** | **LED SURFACE LIGHT**
- 09** | **LED STRIP LIGHT**
- 10** | **LED FLEXIBLE LIGHT**
- 11** | **LED DRIVERS**



QUALITY

At DORO Lights, quality is embedded in every step—from sourcing premium materials to meticulous craftsmanship. Our lights undergo strict checks to ensure they meet the highest standards before reaching our customers.



INNOVATION

We constantly push boundaries by integrating smart technology and ontemporany design trends. DORO Lights creates unique lighting solutions that enhance both ambiance and functionality.



WARRANTY

We believe in the durability of our products, which is why each DORO light comes with a comprehensive warranty. It reflects our confidence and commitment to long-term customer trust and satisfaction.

The History of Lights



1802

Humphry Davy


Invented the Electrical ARC lamp.



1840

Warren de la Rue


Built a light bulb using a platinum filament that was coiled inside a vacuum tube.



1874

Henry Woodward & Mathew Evans


Built a light bulb using a platinum filament that was coiled inside a vacuum tube.



1878

Thomas Edison

Filed a patent under the label "improvement in Electric Lights."



1879

Edison

Submitted another patent.



1880

Edison


Began marketing and manufacturing the latest version of his bulb to commercial clients & built the first central power plant in the U.S



1893

General Electric


Produced the first enclosed carbon arc lamp for commercial clients.



1893

Nikola Tesla


Demonstrated the possibility of wireless electricity, which he used to light a geissler tube.



1901

Peter Cooper Hewitt

Introduced the Mercury-Vapor Lamp (gas discharge lamp).



1910

Georges Claude
Demonstrated Neon Lighting.

1926

Edmund Germer
Submitted his patent for the first fluorescent lamp.



1938

Fluorescent lighting
technology was commercialize

1961

*James Beard &
Gary Pittman*
Invented LEDs



1962

Nick Holonyak Jr.
produced the first LED that
emitted light in a visible brand

1872

M. George Craford
Produced a yellow LED.



1979

Shuji Nakamura
Developed a blue LED.

1980

Philips
released its SL model of
the compact fluorescent
lamp (CFL).



2006

LEDs
were finally a competitive
lighting option

2011


Philips
released its SL model of
the compact fluorescent
lamp (CFL).



NOW



RECESSED PIN SPOT LIGHT

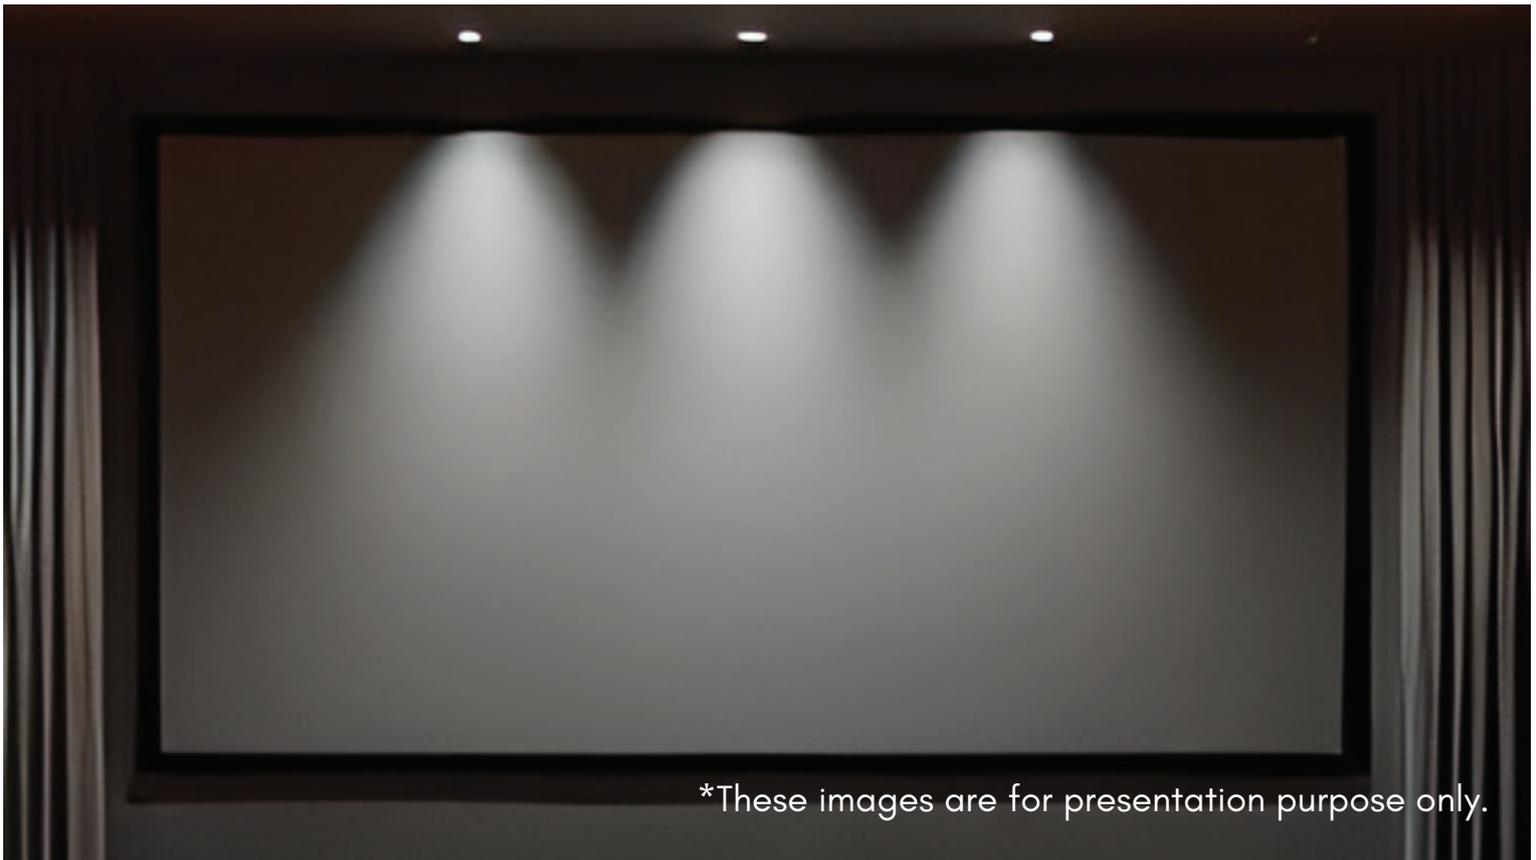

*These images are for presentation purpose only.



Product Code : DRL ECO 0001
Wattage : 3 W
Beam : 38°
Size : Ø37*30 mm
Cutout : Ø30 mm

Product Code : DRL ECO 0001
Wattage : 3 W
Beam : 38°
Size : Ø37*30 mm
Cutout : Ø30 mm

Product Code : DRL ECO 0001
Wattage : 3 W
Beam : 38°
Size : Ø37*30 mm
Cutout : Ø30 mm

GENERAL INFORMATION

CCT



3000K

Body Colour



Led

bridgelux®

Material

Aluminium + PC





Product Code : DRL HC 0001 A
 Wattage : 1 W
 Flux : 53/56 Lm
 Beam : 15°
 Size : Ø29*38 mm
 Cutout : Ø25 mm



Product Code : DRL HC 0001 B
 Wattage : 1 W
 Flux : 35/37 Lm
 Beam : 24°
 Size : Ø23*68 mm
 Cutout : Ø20 mm



Product Code : DRL HC 0001 C
 Wattage : 1 W
 Flux : 39/41 Lm
 Beam : 45°
 Size : Ø23*52 mm
 Cutout : Ø20 mm

GENERAL INFORMATION

CCT



3000K

Body Colour



Led

OSRAM

Material

Aluminium + PC





Product Code : DRL HC 0002
Wattage : 1 W
Flux : 70 Lm
Led : 50°
Size : Ø16*20 mm
Cutout : Ø12 mm



Product Code : DRL HC 0003
Wattage : 1 W
Flux : 70 Lm
Led : 50°
Size : Ø16*24 mm
Cutout : Ø12 mm



Product Code : DRL HC 0004
Wattage : 1 W
Flux : 70 Lm
Led : 45°
Size : Ø22*22 mm
Cutout : Ø16 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

PHILIPS

Material

Aluminium + PC





Product Code : DRL HC 0005A
 Wattage : 3 W
 Flux : 340 Lm
 Size : Ø63*47 mm
 Cutout : Ø45 mm

GENERAL INFORMATION

CCT	Body Colour	Led	Material	Adjustable
 3000K		CREE 	Aluminium + PC	20°



Product Code : DRL LRS 0005B
 Wattage : 3 W
 Beam : 38°
 Size : Ø32*28 mm
 Cutout : Ø25 mm

GENERAL INFORMATION

CCT	Body Colour	Led	Material
 3000K			Aluminium + PC



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0006
Wattage : 3 W
Flux : 255 Lm
Size : Ø41*38 mm
Cutout : Ø35 mm



Product Code : DRL HC 0007
Wattage : 3 W
Flux : 255 Lm
Size : Ø43*41 mm
Cutout : Ø35 mm



Product Code : DRL HC 0008
Wattage : 3 W
Flux : 147 Lm
Size : Ø52*70 mm
Cutout : Ø45 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

Material

Aluminium

Adjustment

24°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0009
 Wattage : 3 W
 Flux : 180/191 Lm
 Beam : 8°
 Size : Ø41*68 mm
 Cutout : Ø35 mm



Product Code : DRL HC 0010
 Wattage : 5 W
 Flux : 400/420 Lm
 Beam : 12°
 Size : Ø55*80 mm
 Cutout : Ø50 mm



Product Code : DRL HC 0011
 Wattage : 3 W
 Flux : 182 Lm
 Beam : 8°
 Size : 41*41*65 mm
 Cutout : 35*35 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

CREE ⇄

Material

Aluminium





Product Code : DRL HC 0012
Wattage : 5 W
Flux : 320 Lm
Beam : 12°
Size : 55*55*35 mm
Cutout : 50*50 mm



Product Code : DRL HC 0013
Wattage : 5 W
Flux : 700 Lm
Beam : 4°
Size : Ø78*92 mm
Cutout : Ø70 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

CREE ⇄

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0014
 Wattage : 5W
 Flux : 500 Lm
 Size : Ø30*71.5 mm
 Cutout : Ø25mm



Product Code : DRL HC 0015
 Wattage : 10 W
 Flux : 1000 Lm
 Size : Ø35*89 mm
 Cutout : Ø30 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

bridgelux.

Material

Aluminium

Beam

24°



TRACK SYSTEM



*These images are for presentation purpose only.



Product Code : DRL HC 0016 - 1
 Wattage : 3 W
 Flux : 150/158 Lm
 Beam : 15/24°
 Size : Ø33*58*55 mm



Product Code : DRL HC 0016 - 2
 Wattage : 5 W
 Flux : 400 Lm
 Beam : 30/38°
 Size : Ø33*67*55 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

bridgelux®

Material

Aluminium

Adjustable

350° & 90°

OSRAM



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 3001
Wattage : 10W
Flux : 305 Lm
Size : 28*148*5.3 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

bridgelux[®]

Material

Aluminium

**CRI
≥90**

IP 20

**48V
DC**

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 3002-A
 Wattage : 4 W
 Beam : 60°
 Flux : 320 Lm
 Size : 148*28 mm
 Cutout : Ø28 mm

Product Code : DRL HC 3002-B
 Wattage : 7 W
 Beam : 24°
 Flux : 560 Lm
 Size : 148*28 mm
 Cutout : Ø34 mm

Product Code : DRL HC 3002-C
 Wattage : 10 W
 Beam : 24°
 Flux : 800 Lm
 Size : 148*28 mm
 Cutout : Ø34 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

bridgelux®

Material

Aluminium

Adjustable

90° & 355°






Product Code : DRL HC 3003
 Wattage : 10 W
 Beam : 24°
 Flux : 800 Lm
 Size : 148*28 mm
 Cutout : Ø80 mm

GENERAL INFORMATION

CCT



Body Colour



Led



Material

Aluminium

Adjustable


20° & 355°



Product Code : DRL HC 3004
 Wattage : 12 W
 Beam : 120°
 Flux : 600 Lm
 Size : 148*28 mm
 Cutout : Ø126 mm

GENERAL INFORMATION

CCT



Body Colour



Led

OSRAM

Material

Aluminium





Product Code : DRL HC 3005
Wattage : 12 W
Beam : 60°
Flux : 400 Lm
Size : 300*45*47 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

Material

Aluminium

Adjustable

80°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 3006 A
 Wattage : 8 W
 Beam : 60°
 Flux : 400 Lm
 Size : 28*300|600 mm

Product Code : DRL HC 3006 B
 Wattage : 16 W
 Beam : 60°
 Flux : 800 Lm
 Size : 28*300|600 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led


OSRAM

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 3007 A
 Wattage : 10 W
 Beam : 100°
 Flux : 500 Lm
 Size : 28*502|1000 mm

Product Code : DRL HC 3007 B
 Wattage : 20 W
 Beam : 100°
 Flux : 1000 Lm
 Size : 28*502|1000 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 3008 A
Wattage : 10 W
Beam : 100°
Flux : 500 Lm
Size : 28*82*1000 mm



Product Code : DRL HC 3008 B
Wattage : 12 W
Beam : 360°
Flux : 960 Lm
Size : 66*1000 mm
Cutout : Ø20mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

bridgelux®

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product : Magnaline Recessed Track 1mtr.
Size : 1000*43*34mm
Cutout : Ø1000*50mm
Material : Aluminium
Body Colour : Black



Product : Magnaline Recessed Track 2mtr.
Size : 2000*43*34mm
Cutout : Ø2000*50mm
Material : Aluminium
Body Colour : Black



Product : Magnaline Surfaced Track 1mtr.
Size : 1000*12*34mm
Material : Aluminium
Body Colour : Black



Product : Magnaline Surfaced Track 2mtr.
Size : 2000*12*34mm
Material : Aluminium
Body Colour : Black



Product : Magnaline Recessed Curved Corner
Size : 565*565mm
Cutout : 15*565mm
Material : Aluminium
Body Colour : Black




Product : Magnaline Surfaced Curved Corner
Size : 565*565mm
Material : Aluminium
Body Colour : Black




Product : Magnaline L-Recessed Corner
Size : 62*62mm
Cutout : 15*62mm
Material : Aluminium
Body Colour : Black




Product : Magnaline L-Surfaced Corner
Size : 50*50mm
Material : Aluminium
Body Colour : Black

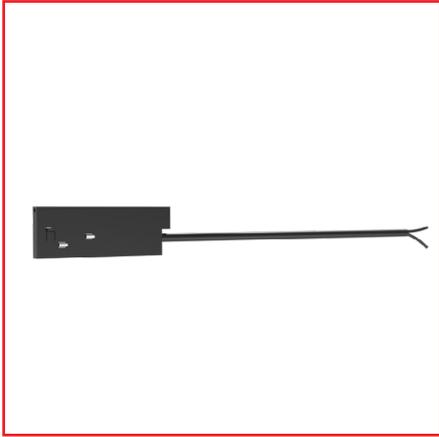

**Magnaline Power
Connector**

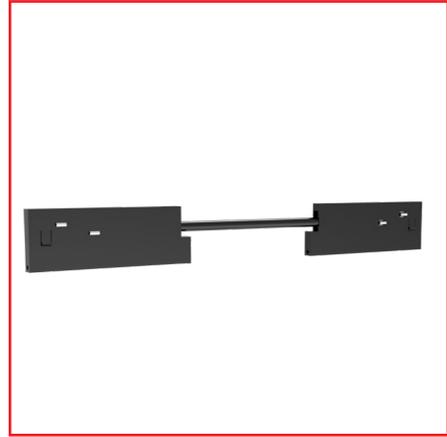

**Magnaline Corner
Connector**

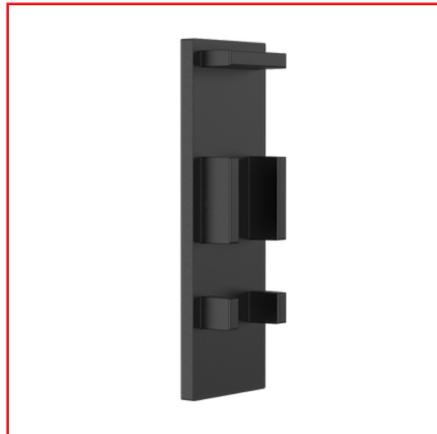

Magnalin End Cap



Product Code : DRL HC 0017
 Wattage : 3 W
 Flux : 150/158 Lm
 Size : Ø33*58*55 mm

GENERAL INFORMATION

CCT	Body Colour	Led	Material	Adjustment
 3000K	 4000K	 	OSRAM Aluminium	350° & 90°



Product Code : DRL HC 0018
 Wattage : 6 W
 Flux : 250 Lm
 Size : Ø320*12*13 mm

GENERAL INFORMATION

CCT	Body Colour	Led	Material	Adjustment
 3000K	 4000K	 	 Aluminium	90°





Product Code : DRL HC 0019
Wattage : 5 W
Flux : 160 Lm
Size : Ø320*12*13 mm



Product Code : DRL HC 0019
Wattage : 10 W
Flux : 300 Lm
Size : Ø518*12*13 mm



Product Code : DRL HC 0019
Wattage : 150 W
Flux : 425 Lm
Size : Ø716*12*13 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

bridgelux®

Material

Aluminium

Adjustment

120°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0020
Wattage : 5W - WW
Flux : 305 Lm
Size : Ø250*15*21 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0021
Wattage : 6 W
Flux : 330 Lm
Size : Ø105*16*39 mm



Product Code : DRL HC 0021
Wattage : 12 W
Flux : 577 Lm
Size : Ø205*16*39 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0022
 Wattage : 6 W
 Flux : 330 Lm
 Size : Ø105*16*39 mm



Product Code : DRL HC 0022
 Wattage : 12 W
 Flux : 577 Lm
 Size : Ø205*16*39 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

Material

Aluminium

Adjustment

90°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0023
Wattage : 3 W
Flux : 145 Lm
Beam : 150°
Size : Ø50*78 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

Material

Aluminium

Adjustment

90°

CRI
≥90

IP 20

24V
DC



Product Code : DRL HC 0024
Wattage : 3 W
Flux : 104 Lm
Beam : 30°
Size : Ø55*61 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

Material

Aluminium

CRI
≥90

IP 20

24V
DC



Product Code	Trimless Track 0.5 m	Trimless Track 1 m
Size	503*56*19 mm	1003*56*19 mm
Cutout	503*17 mm	1003*17 mm
Material	Aluminium	Aluminium
Body Colour	Black	Black



Product Code	Recessed Track 0.5 m	Recessed Track 1 m
Size	503*23.5*19 mm	1003*23.5*19 mm
Cutout	503*17 mm	1003*17 mm
Material	Aluminium	Aluminium
Body Colour	Black	Black



Product Code	Surface Track-0.5 m	Surface Track- 1 m
Size	503*16*19 mm	1003*16*19 mm
Material	Aluminium	Aluminium
Body Colour	Black	Black



Product Code	Hanging Track-0.5 m	Hanging Track- 1 Mtr.
Size	503*16*19 mm	1003*16*19 mm
Material	Aluminium	Aluminium
Body Colour	Black	Black



Product Code : Trimless Corner
Size : 55*55*19 mm
Cutout : 35*17 mm
Material : Aluminium
Body Colour : Black



Product Code : Trimless Inner Corner
Size : 40*40*19 mm
Cutout : 24*17 mm
Material : Aluminium
Body Colour : Black



Product Code : Recessed Corner
Size : 40*40*19 mm
Cutout : 36*17 mm
Material : Aluminium
Body Colour : Black



Product Code : Recessed Inner Corner
Size : 40*40*19 mm
Cutout : 22*17 mm
Material : Aluminium
Body Colour : Black



Product Code : Surface Corner
Size : 55*55*19 mm
Material : Aluminium
Body Colour : Black



Product Code : Surface Inner Corner
Size : 40*40*19 mm
Material : Aluminium
Body Colour : Black



Product Code : Surface Installation Box
Size : Ø50*71 mm
Material : Aluminium
Body Colour : Black



Product Code : Recessed Installation Box
Size : Ø68*45 mm
Cutout : Ø60 mm
Material : Aluminium
Body Colour : Black



Ultra Corner Connector



**Ultra Power Connector
with Sensor**



Ultra Power Connector



**Ultra Double Power
Connector**



**Ultra Power Connector
With Pressure Sensor**

TRACK SYSTEM




*These images are for presentation purpose only.



Product Code : DRL HC 0025
Wattage : 12 W
Flux : 684 Lm
Size : 225*45 mm



Product Code : DRL HC 0025
Wattage : 18 W
Flux : 1026 Lm
Size : 328*45 mm

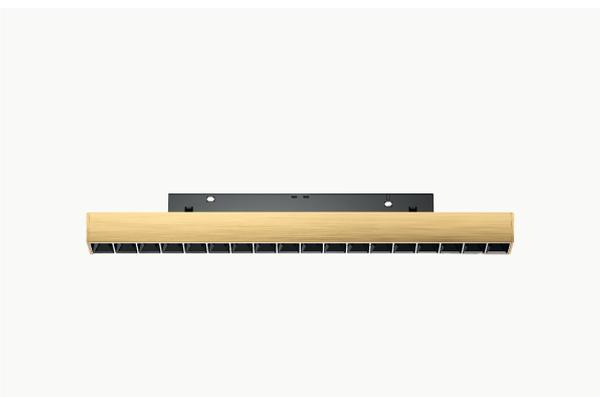

Product Code : DRL HC 0025
Wattage : 24 W
Flux : 1368 Lm
Size : 436*45 mm

GENERAL INFORMATION

CCT



2700-6500K

Body Colour



(Brushed Gold & Black)

Led

TOYONIA

Material

Aluminium

Beam

24°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0026
Wattage : 10 W
Flux : 570 Lm
Size : 300*45 mm



Product Code : DRL HC 0026
Wattage : 20 W
Flux : 1140 Lm
Size : 600*45 mm



Product Code : DRL HC 0026
Wattage : 30 W
Flux : 1710 Lm
Size : 900*45 mm

GENERAL INFORMATION

CCT



2700-6500K

Body Colour



(Brushed Gold & Black)

Led

OSRAM

Material

Aluminium

Beam

110°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0027
Wattage : 36 W
Flux : 2052 Lm
Size : 600*400 mm

GENERAL INFORMATION

CCT



2700-6500K

Body Colour



(Brushed Gold & Black)

Led

OSRAM

Material

Aluminium

Beam

110°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0028
Wattage : 6 W
Flux : 342 Lm
Size : 116*103 mm



Product Code : DRL HC 0028
Wattage : 12 W
Flux : 684 Lm
Size : 225*103 mm

GENERAL INFORMATION

CCT



2700-6500K

Body Colour



(Brushed Gold & Black)

Led

TOYONIA

Material

Aluminium

Beam

24°

CRI
≥90

IP 20

Adjustable

355° & 80°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0029
Wattage : 6 W
Flux : 342 Lm
Size : 116*103 mm



Product Code : DRL HC 0029
Wattage : 12 W
Flux : 684 Lm
Size : 225*103 mm

GENERAL INFORMATION

CCT



2700-6500K

Body Colour



(Brushed Gold & Black)

Led

TOYONIA

Material

Aluminium

Beam


36°



Adjustable

355° & 90°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

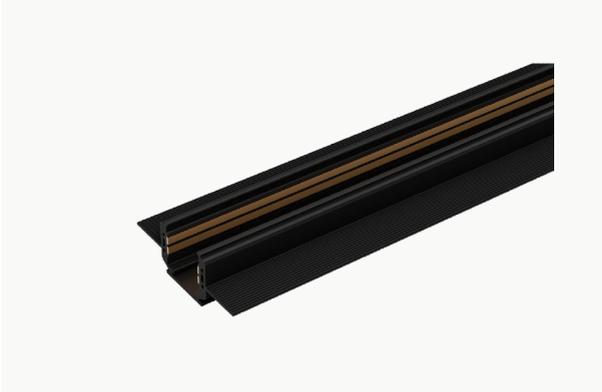


Product Code : RECESSED TRACK-TW 1 m
Size : 1000*60.2*21mm
Cutout : 27*21 mm
Material : Aluminium
Body Colour : Black



Product Code : RECESSED TRACK-TW 2 m
Size : 2000*60.2*21mm
Cutout : 27*21 mm
Material : Aluminium
Body Colour : Black



Product Code : RECESSED TRACK-TW 3 m
Size : 3000*60.2*21mm
Cutout : 27*21 mm
Material : Aluminium
Body Colour : Black



Product Code : Recessed Corner - TW
Size : 80*80*21 mm
Cutout : 27*21 mm
Material : Aluminium
Body Colour : Black



Product Code : Recessed Outer Corner - TW
Size : 80*80*21 mm
Cutout : 27*21 mm
Material : Aluminium
Body Colour : Black



Product Code : Recessed Inner Corner - TW
Size : 80*80*21 mm
Cutout : 27*21 mm
Material : Aluminium
Body Colour : Black



Product Code : SURFACE TRACK-TW 1 m
Size : 1000*26*21mm
Material : Aluminium
Body Colour : Black



Product Code : SURFACE TRACK-TW 2 m
Size : 2000*26*21mm
Material : Aluminium
Body Colour : Black



Product Code : Surface Corner - TW
Size : 80*80*21 mm
Material : Aluminium
Body Colour : Black



Product Code : Surface Outer Corner - TW
Size : 80*80*21 mm
Material : Aluminium
Body Colour : Black



Product Code : Surface Inner Corner - TW
Size : 80*80*21 mm
Material : Aluminium
Body Colour : Black



Corner Connector TW



Power Connector TW



Double Power Connector TW



Driver 150W TW



Driver 200W TW



TRACK SYSTEM

*These images are for presentation purpose only.



Product Code : DRL HC 0030
Wattage : 13 W
Flux : 1190/1249 Lm
Size : Ø30*600 mm

Product Code : DRL HC 0030
Wattage : 20 W
Flux : 2088/2192 Lm
Size : Ø30*900 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour



Led



Material

Aluminium + PC

Adjustable

350°

CRI
≥90

IP 20

24V
DC

Beam

110°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0031
Wattage : 9 W
Flux : 688/722 Lm
Size : 112*20*96 mm



Product Code : DRL HC 0031
Wattage : 18 W
Flux : 1478/1551 Lm
Size : 220*20*96 mm



Product Code DRL HC 0031
Wattage : 9 W
Flux : 596/625 Lm
Size : 300*20*96 mm

GENERAL INFORMATION

CCT



3000K



4000K

Body Colour



Led

OSRAM

Material

Aluminium + PC

Adjustable

90°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0120
Wattage : 6 W
Flux : 236/394 Lm
Size : 200*52.6*20 mm

Product Code : DRL HC 0120
Wattage : 12 W
Flux : 677/712 Lm
Size : 200*52.6*20 mm

Product Code : DRL HC 0120
Wattage : 18 W
Flux : 947/994 Lm
Size : 225*52.6*20 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

CREE 

Material

Aluminium + PC

Beam

24°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0032
Wattage : 9 W
Flux : 307/322 Lm
Size : 300*52.6*20 mm

Product Code : DRL HC 0032
Wattage : 15 W
Flux : 667/700 Lm
Size : 600*52.6*20 mm

Product Code : DRL HC 0032
Wattage : 25 W
Flux : 1027/1130 Lm
Size : 900*52.6*20 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

bridgelux®

Material

Aluminium + PC

Adjustment

350°



Beam

110°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0033
 Wattage : 7 W
 Flux : 417/437 Lm
 Size : 200*15*73.8 mm

Product Code : DRL HC 0033
 Wattage : 12 W
 Flux : 1023/1074 Lm
 Size : 200*61*90.2 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

CREE ⇄

Material

Aluminium + PC

Adjustment

355° & 90°



Beam

24°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0034
Wattage : 5 W
Flux : 261 Lm
Size : 200*75*107.2 mm



Product Code : DRL HC 0034
Wattage : 5 W
Flux : 247 Lm
Size : 200*80*58.5 mm

GENERAL INFORMATION

CCT



3000K

Body Colour



Led

CREE 

Material

Aluminium + PC

Adjustable

30°



Beam

24°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code	Recessed Track 1 Mtr 1.5 Mtr 2 Mtr
Size	1004*74*60mm 1504*74*60mm 2004*74*60mm
Cutout	1005*30 mm 1505*30mm 2005*30mm
Material	Aluminium
Body Colour	Black



Product Code	Surface Track 1 Mtr 1.5 Mtr 2 Mtr
Size	1004*28*60mm 1504*28*60mm 2004*28*60mm
Material	Aluminium
Body Colour	Black



Product Code	Hanging Track 1 Mtr 1.5 Mtr 2 Mtr
Size	1004*28*60mm 1504*28*60mm 2004*28*60mm
Material	Aluminium
Body Colour	Black



Product Code : RECESSED CORNER
Size : 200*200*74 mm
Cutout : 180*30mm
Material : Aluminium
Body Colour : Black



Product Code : RECESSED OUTER CORNER
Size : 175*175*60 mm
Cutout : 120*30mm
Material : Aluminium
Body Colour : Black



Product Code : RECESSED INNER CORNER
Size : 175*175*60 mm
Cutout : 170*30mm
Material : Aluminium
Body Colour : Black



Product Code : SURFACE CORNER
Size : 175*175*60 mm
Cutout : NA
Material : Aluminium
Body Colour : Black



Product Code : SURFACE INNER CORNER
Size : 175*175*60 mm
Cutout : NA
Material : Aluminium
Body Colour : Black



Product Code : RECESSED OUTER CORNER
Size : 175*175*60 mm
Cutout : NA
Material : Aluminium
Body Colour : Black



Decorative Part



Magnetic Connector



Power Connector




Double Power Connector




Corner Connector



4 Installation Method

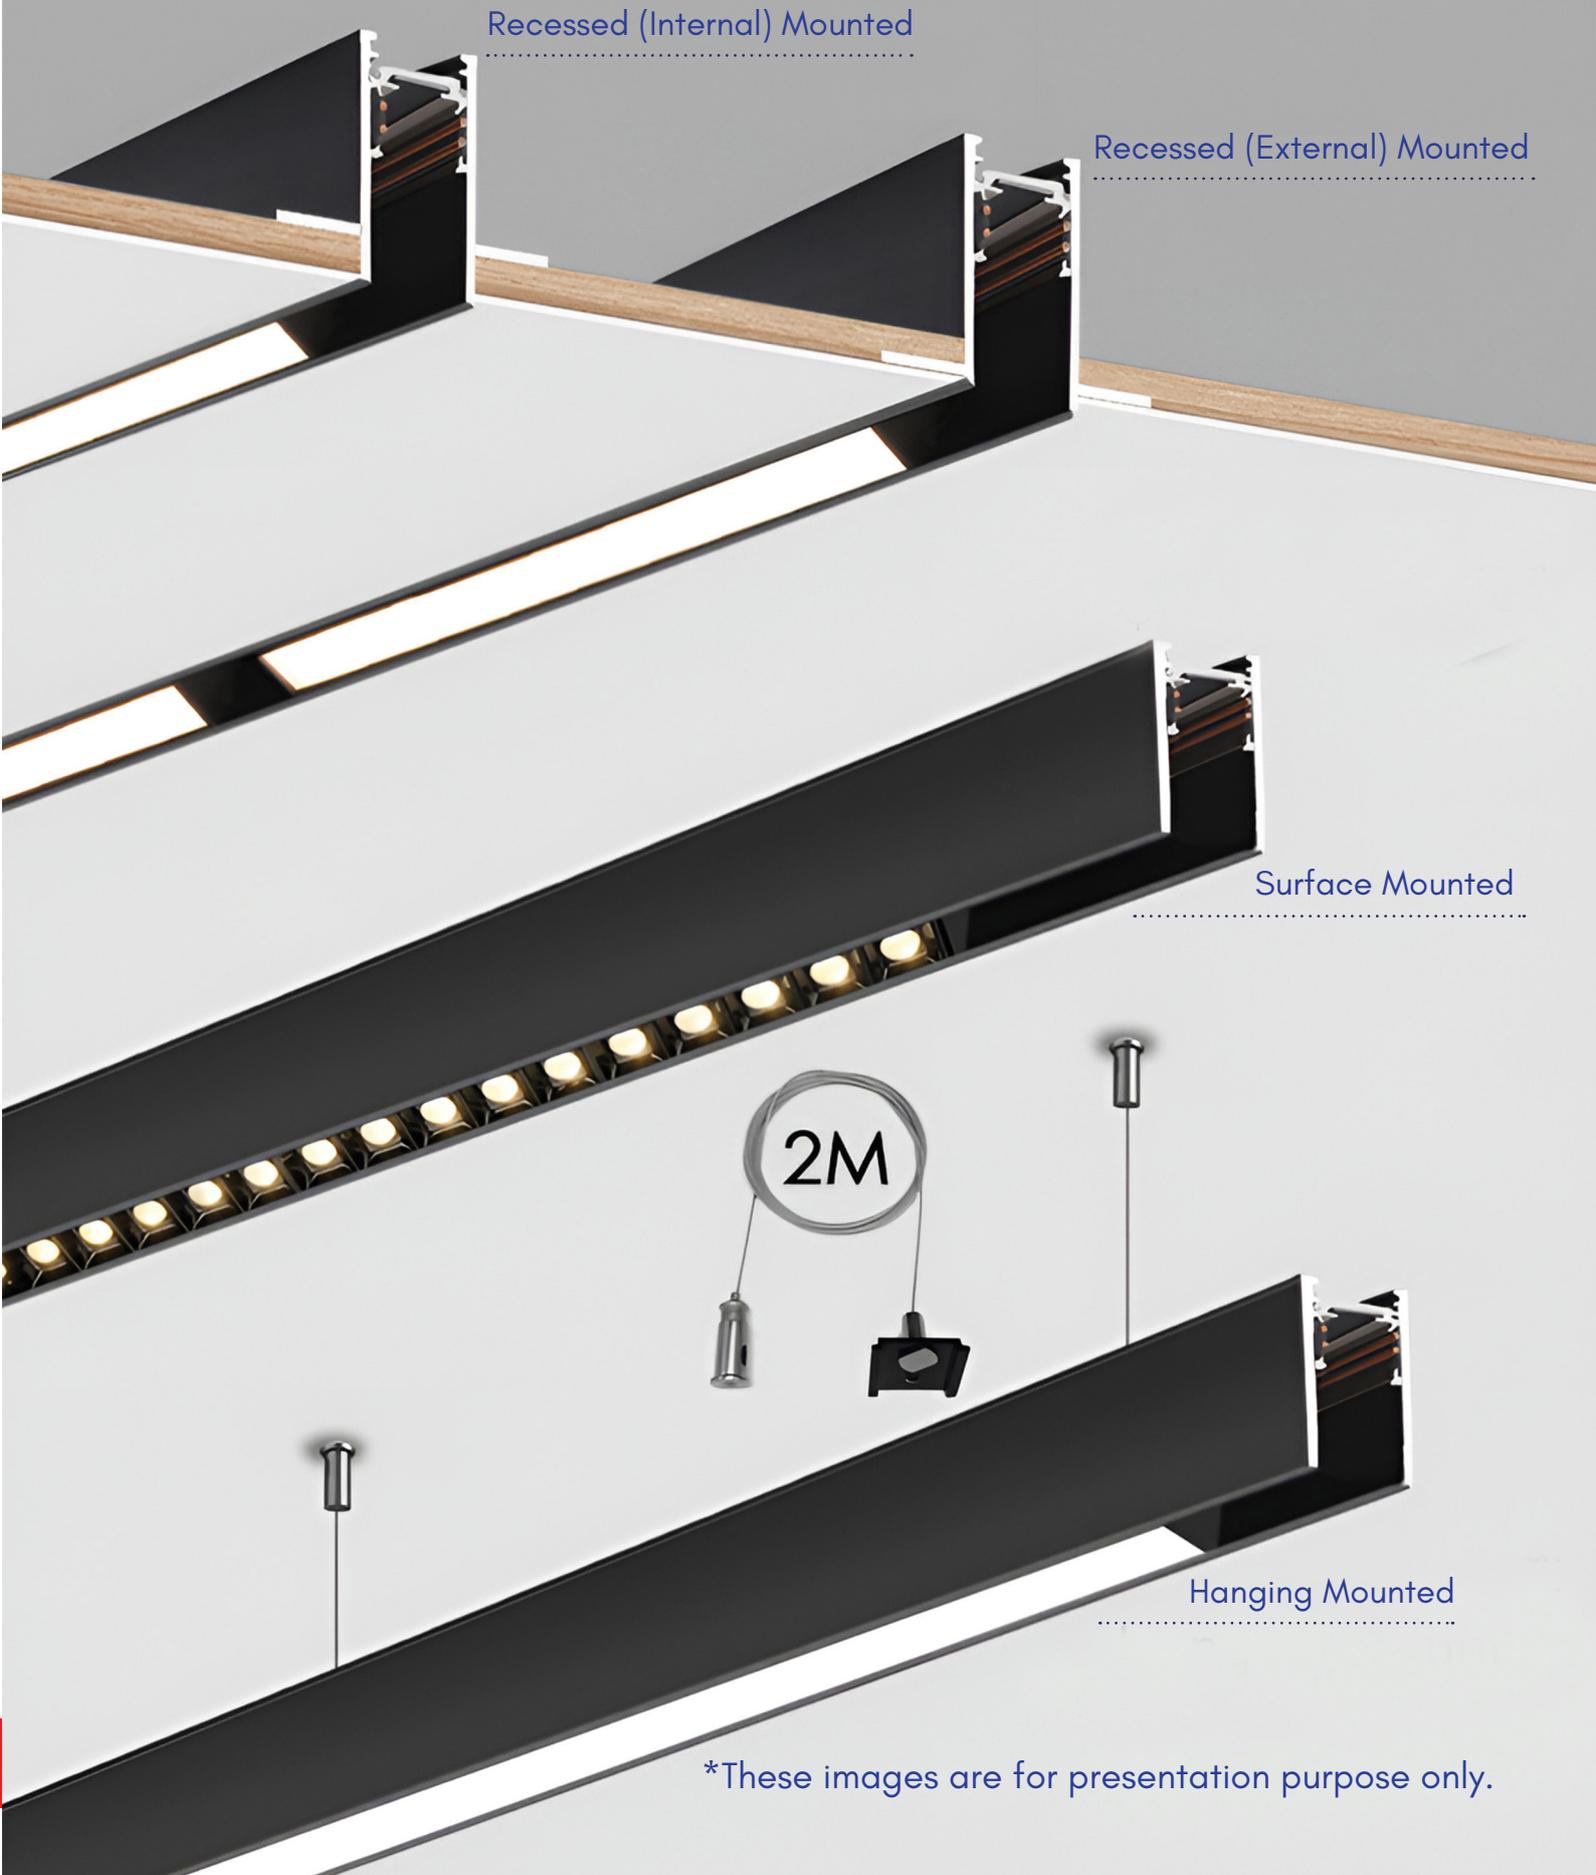

*These images are for presentation purpose only.

RECESSED AND TRIMLESS SPOT LIGHT



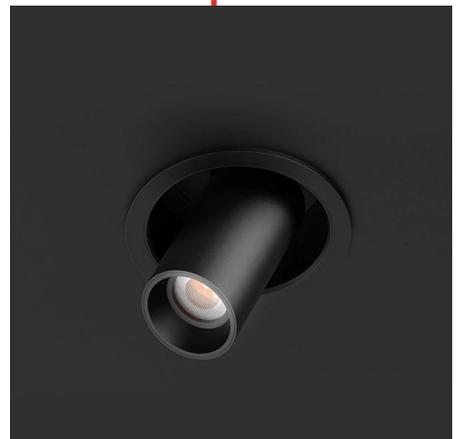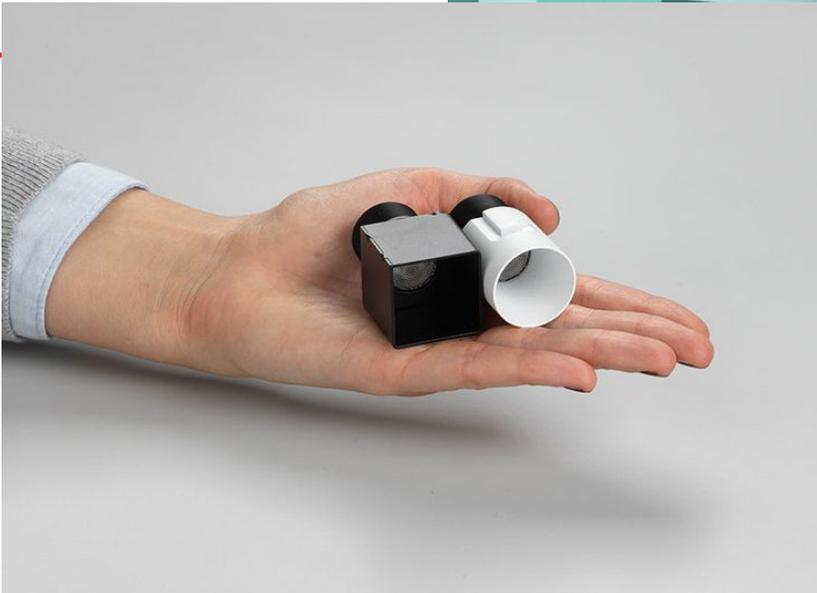



Product Code : DRL HC 3009 E
 Wattage : 6 W
 Size : Ø45*55 mm
 Cutout : Ø35mm
 Beam : 36°
 Flux : 501 Lm

Product Code : DRL HC 3009 H
 Wattage : 6 W
 Size : Ø50*47 mm
 Cutout : Ø35mm
 Beam : 36°
 Flux : 501 Lm

GENERAL INFORMATION

CCT



 Tunable
 3000K 4000K White

Body Colour

Pearl White | Matte White |
 Pearl Black | Bronze | Gold

Led

Seoul Semiconductor



Material

Aluminium

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 3010 E
 Wattage : 10 W
 Size : Ø45*78 mm
 Cutout : Ø35mm
 Beam : 36°
 Flux : 993 Lm

Product Code : DRL HC 3010 H
 Wattage : 10 W
 Size : Ø50*75 mm
 Cutout : Ø35mm
 Beam : 36°
 Flux : 993 Lm

GENERAL INFORMATION

CCT



 Tunable
 3000K 4000K White

Body Colour

Pearl White | Matte White |
 Pearl Black | Bronze | Gold

Led

Seoul Semiconductor



Material

Aluminium

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 3011
 Wattage : 8 W
 Size : Ø65*84 mm
 Cutout : Ø58mm
 Beam : 36°|60°
 Flux : 749 Lm

Product Code : DRL HC 3011
 Wattage : 15 W
 Size : Ø65*108 mm
 Cutout : Ø58mm
 Beam : 36°|60°
 Flux : 1158 Lm

GENERAL INFORMATION

CCT



3000K



4000K

Tunable
White

Body Colour

Pearl White | Matte White |
Pearl Black | Matte Black

Led

Seoul Semiconductor



Material

Aluminium

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 3012
 Wattage : 10 W
 Size : Ø60*78 mm
 Cutout : Ø55mm
 Beam : 36°
 Flux : 572 Lm

Product Code : DRL HC 3012 Trimless
 Wattage : 10 W
 Size : Ø90*78 mm
 Cutout : Ø55mm
 Beam : 36°
 Flux : 572 Lm

Product Code : DRL HC 3012
 Wattage : 15 W
 Size : Ø82*106 mm
 Cutout : Ø75mm
 Beam : 24°|36°
 Flux : 1176 Lm

Product Code : DRL HC 3012 Trimless
 Wattage : 15 W
 Size : Ø110*106 mm
 Cutout : Ø75mm
 Beam : 24°|36°
 Flux : 1176 Lm

GENERAL INFORMATION

CCT




 3000K 4000K 5000K

Body Colour




Led

CREE 
 TOYONIA

CRI
 ≥90

IP 20

Material
 Aluminium

Adjustable
 10W- 25° & 360°

Adjustable
 15W- 20° & 360°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0035
 Wattage : 6 W
 Beam : 24°
 Size : 30*80 mm
 Cutout : 25 mm

Product Code : DRL TD 0035
 Wattage : 20 W
 Flux : 1650 Lm
 Beam : 15°-55°
 Cutout : Ø74*259 mm

GENERAL INFORMATION

CCT

 
 3000K 4000K

Body Colour



Led



Material

Aluminium

Adjustable

355° & 90°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0036
 Wattage : 9 W
 Beam : 24° 36° 50°
 Size : 56*100 mm
 Cutout : 50 mm

Product Code : DRL TD 0036
 Wattage : 15 W
 Beam : 24° 36° 50°
 Size : 72*100 mm
 Cutout : 65 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0037
 Wattage : 9 W
 Beam : 24°36°50°
 Size : 56*100 mm
 Cutout : 50 mm

Product Code : DRL TD 0037
 Wattage : 15 W
 Beam : 24°36°50°
 Size : 72*100 mm
 Cutout : 65 mm

GENERAL INFORMATION

CCT

 
 3000K 4000K

Body Colour



Led



Material

Aluminium

Adjustable

Tilttable



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0038 Trimless Rim
 Wattage : 9 W
 Beam : 24° 36° 50°
 Size : 56*100 mm
 Cutout : 50 mm

Product Code : DRL TD 0038 Trimless Rim
 Wattage : 15 W
 Beam : 24° 36° 50°
 Size : 72*100 mm
 Cutout : 65 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL LRS 0039
 Wattage : 9 W
 Beam : 36°
 Size : Ø75*72 mm
 Cutout : Ø52 mm

Product Code : DRL LRS 0039
 Wattage : 15 W
 Beam : 36°
 Size : Ø105*98 mm
 Cutout : Ø95 mm

GENERAL INFORMATION

CCT

 
 3000K 4000K

Body Colour



Led



Material

Aluminium



TUNNABLE AND DIMMABLE AVAILABLE ON REQUEST

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL LRS 0040
Wattage : 9 W
Beam : 36°
Size : Ø60*552 mm
Cutout : Ø55 mm

Product Code : DRL LRS 0040
Wattage : 15 W
Beam : 36°
Size : Ø80*62 mm
Cutout : Ø75 mm

Product Code : DRL LRS 0040
Wattage : 30 W
Beam : 36°
Size : Ø105*83 mm
Cutout : Ø95 mm

Product Code : DRL LRS 0040
Wattage : 50 W
Beam : 36°
Size : Ø135*90 mm
Cutout : Ø125 mm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour



Led

bridgelux®

Material

Aluminium



TUNNABLE AND DIMMABLE AVAILABLE ON REQUEST

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0041
Wattage : 7 W
Beam : 15°
Cutout : 80*80 mm
Flux : 315 Lm



Product Code : DRL HC 0041
Wattage : 14 W
Beam : 20°
Cutout : 80*140 mm
Flux : 630 Lm



Product Code : DRL HC 0041
Wattage : 21 W
Beam : 30°
Cutout : 80*205 mm
Flux : 945 Lm

GENERAL INFORMATION

CCT




 3000K 4000K 6000K

Body Colour




Led

Seoul
Semiconductor

Material

Aluminium



Adjustment

15° & 22°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0042
 Wattage : 5 W
 Cutout : Ø30 mm
 Beam : 10 | 24°
 Flux : 241 Lm

Product Code : DRL HC 0042
 Wattage : 7 W
 Cutout : Ø40 mm
 Beam : 8 | 12°
 Flux : 317 Lm

Product Code : DRL HC 0042
 Wattage : 9 W
 Cutout : Ø50 mm
 Beam : 8 | 12 | 24 | 36°
 Flux : 328 Lm

GENERAL INFORMATION

CCT



3000K

Body Colour



Led

Seoul
Semiconductor

Material

Aluminium

Adjustment

30° & 350°





Product Code : DRL LRS 0118
Wattage : 7 W
Beam : 24°
Size : Ø 63*52 mm
Cutout : Ø 55 mm

Product Code : DRL LRS 0118
Wattage : 12 W
Beam : 24°
Size : Ø 85*64 mm
Cutout : Ø 75 mm

Product Code : DRL LRS 0118
Wattage : 18 W
Beam : 24°
Size : Ø 102*74 mm
Cutout : Ø 90 mm

GENERAL INFORMATION

CCT



3000K 4000K 6000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL LRS 0119
Wattage : 7 W
Beam : 24°
Size : Ø 62*59 mm
Cutout : Ø 55 mm

Product Code : DRL LRS 0119
Wattage : 12 W
Beam : 24°
Size : Ø 85*64 mm
Cutout : Ø 75 mm

Product Code : DRL LRS 0119
Wattage : 18 W
Beam : 24°
Size : Ø 105*72 mm
Cutout : Ø 90 mm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

bridgelux.

Material

Aluminium

CRI
≥80

IP 54

High
Lumen

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0043
 Wattage : 15 W
 Cutout : Ø75 mm
 Beam : 24° | 36°
 Flux : 1176 Lm



Product Code : DRL HC 0044
 Wattage : 15 W
 Cutout : Ø75 mm
 Beam : 24° | 36°
 Flux : 1176 Lm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

CREE 

Material

Aluminium

CRI
≥90

IP 20

Adjustment

20° & 360°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0045 RD
 Wattage : 8 W
 Cutout : Ø35 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 588 Lm

Product Code : DRL HC 0045 RD
 Wattage : 15 W
 Cutout : Ø75 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 1150 Lm

Product Code : DRL HC 0045 RD
 Wattage : 25 W
 Cutout : Ø95 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 2086 Lm

GENERAL INFORMATION

CCT




 3000K 4000K 6000K

Body Colour




Led

Seoul
Semiconductor

Material

Aluminium

CRI
≥90

IP 20

Adjustment

30° & 360°



Product Code : DRL HC 0046 Trimless RD
 Wattage : 8 W
 Cutout : Ø35 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 588 Lm

Product Code : DRL HC 0046 Trimless RD
 Wattage : 15 W
 Cutout : Ø75 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 1150 Lm

Product Code : DRL HC 0046 Trimless RD
 Wattage : 25 W
 Cutout : Ø95 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 2086 Lm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

Seoul
Semiconductor

Material

Aluminium

CRI
≥90

IP 20

Adjustment

30° & 360°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0047 SQ
 Wattage : 8 W
 Cutout : Ø55*55 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 588 Lm

Product Code : DRL HC 0047 SQ
 Wattage : 15 W
 Cutout : Ø75*75 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 1150 Lm

Product Code : DRL HC 0047 SQ
 Wattage : 25 W
 Cutout : Ø95*95 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 2086 Lm

GENERAL INFORMATION

CCT




 3000K 4000K 6000K

Body Colour




Led

Seoul
Semiconductor

Material

Aluminium

CRI
≥90

IP 20

Adjustment

30° & 360°



Product Code : DRL HC 0049 SQ
 Wattage : 2*8 W
 Cutout : Ø55*10 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 1176 Lm

Product Code : DRL HC 0049 SQ
 Wattage : 2*15 W
 Cutout : Ø75*150 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 2300 Lm

Product Code : DRL HC 0049 SQ
 Wattage : 2*25 W
 Cutout : Ø95*190 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 4172 Lm

GENERAL INFORMATION

CCT




 3000K 4000K 6000K

Body Colour




Led

Seoul
Semiconductor

Material

Aluminium



Adjustment

30° & 360°



Product Code : DRL HC 0050 SQ Trimless
 Wattage : 2*8 W
 Cutout : Ø55*10 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 1176 Lm

Product Code : DRL HC 0050 SQ Trimless
 Wattage : 2*15 W
 Cutout : Ø75*150 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 2300 Lm

Product Code : DRL HC 0050 SQ Trimless
 Wattage : 2*25 W
 Cutout : Ø95*190 mm
 Beam : 15° | 24° | 36° | 50°
 Flux : 4172 Lm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

Seoul
Semiconductor

Material

Aluminium

CRI
≥90

IP 20

Adjustment

30° & 360°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0051
Wattage : 8 W
Cutout : Ø35 mm
Beam : 36°

Product Code : DRL HC 0051
Wattage : 15 W
Cutout : Ø45 mm
Beam : 36°

Product Code : DRL HC 0051
Wattage : 20 W
Cutout : Ø65 mm
Beam : 36°

GENERAL INFORMATION

CCT




 3000K 4000K 6000K

Body Colour





Led

Seoul
Semiconductor

Material

Aluminium



Adjustment

30° & 350°



Product Code : DRL HC 0052
 Wattage : 8 W
 Cutout : Ø35 mm
 Beam : 38°

Product Code : DRL HC 0052
 Wattage : 15 W
 Cutout : Ø45 mm
 Beam : 38°

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

Seoul
Semiconductor

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0053
Wattage : 5 W
Cutout : Ø35 mm
Beam : 24°
Flux : 175 Lm

Product Code : DRL HC 0053
Wattage : 8 W
Cutout : Ø45 mm
Beam : 36°
Flux : 620 Lm

Product Code : DRL HC 0053
Wattage : 15 W
Cutout : Ø65 mm
Beam : 36°
Flux : 1106 Lm

GENERAL INFORMATION

CCT

3000K 4000K 5000K

Body Colour

Led

Seoul
Semiconductor

Material

Aluminium





Adjustment

30° & 350°

CIRACADIAN RHYTHM

At DORO Lights, we design our products with a deep understanding of the vital connection between light and human well-being. Through Human Centric Lighting (HCL), we create solutions that support natural biological rhythms by mimicking the dynamic qualities of daylight.

Our lighting systems are thoughtfully engineered to simulate the natural progression of sunlight – adapting in color temperature, intensity, and movement throughout the day. By aligning artificial lighting with the body's circadian cycle, we help enhance mood, productivity, and overall health in living and working environments.

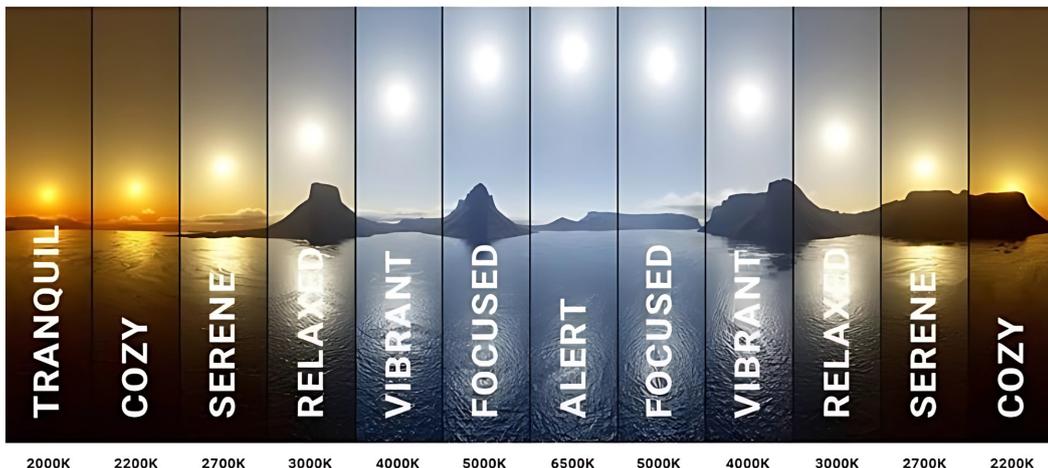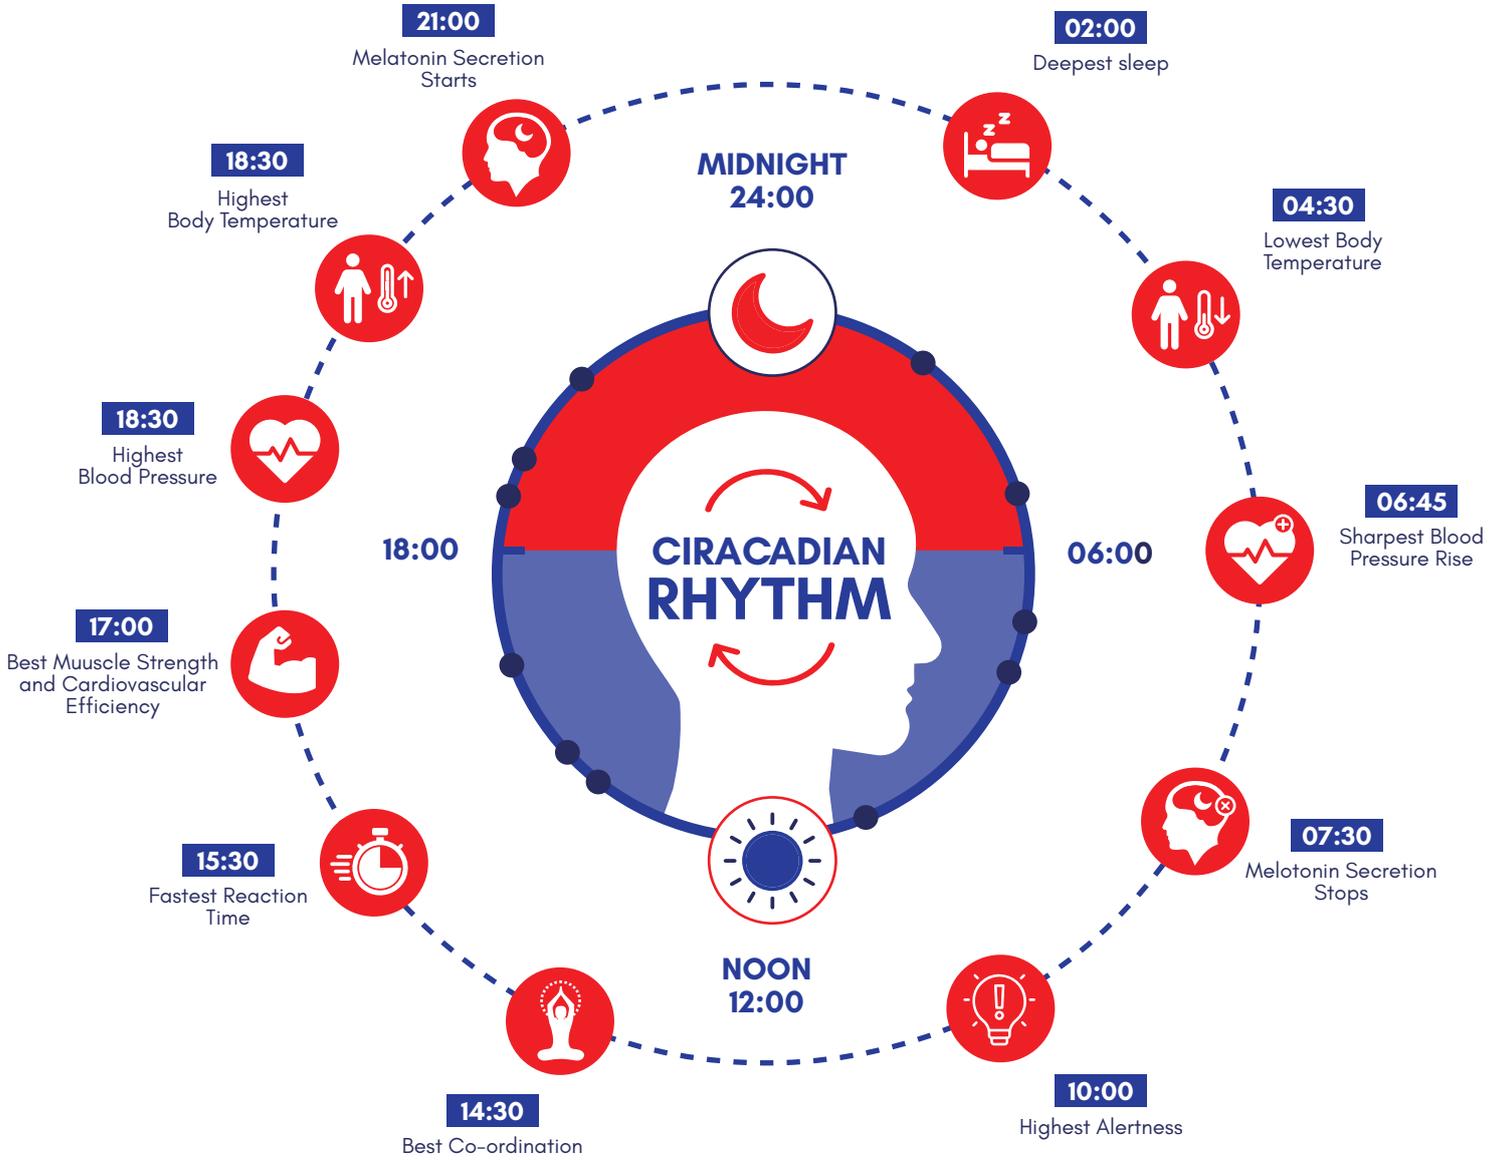

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL LRS 0115
Wattage : 7 W
Beam : 36°
Size : Ø70*55 mm
Cutout : Ø60 mm

Product Code : DRL LRS 0115
Wattage : 12 W
Beam : 36°
Size : Ø80*65 mm
Cutout : Ø70 mm

Product Code : DRL LRS 0115
Wattage : 18 W
Beam : 36°
Size : Ø95*75 mm
Cutout : Ø85 mm

GENERAL INFORMATION

CCT




 3000K 4000K 6000K

Body Colour




Led



Material

Aluminium





Product Code : DRL HC 0054
Wattage : 8 W
Beam : 15° | 24° | 36° | 60°
Cutout : Ø40 mm
Flux : 660 Lm

Product Code : DRL HC 0054
Wattage : 15 W
Beam : 15° | 24° | 36° | 60°
Cutout : Ø65 mm
Flux : 869 Lm

Product Code : DRL HC 0054
Wattage : 20 W
Beam : 15° | 24° | 36° | 60°
Cutout : Ø75 mm
Flux : 1106 Lm

GENERAL INFORMATION

CCT

3000K 4000K 5000K

Body Colour

Led

Seoul
Semiconductor

Material

Aluminium



Adjustment

40° & 350°



Product Code : DRL LRS 0116
Wattage : 5 W
Beam : 36°
Size : Ø 55*63 mm
Cutout : Ø 55 mm

Product Code : DRL LRS 0116
Wattage : 12 W
Beam : 36°
Size : Ø 75*85 mm
Cutout : Ø 75 mm

Product Code : DRL LRS 0116
Wattage : 18 W
Beam : 36°
Size : Ø 95*115 mm
Cutout : Ø 95 mm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

bridgelux.

Material

Aluminium

CRI
≥80

IP 54

High
Lumen

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0055
Wattage : 7 W
Beam : 36°
Cutout : Ø55 mm
Flux : 560 Lm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

bridgelux

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0056
 Wattage : 7W
 Cutout : Ø55 mm
 Beam : 15° | 20° | 30°
 Flux : 315 Lm

Product Code : DRL HC 0056
 Wattage : 10W
 Cutout : Ø75 mm
 Beam : 15° | 20° | 30°
 Flux : 400 Lm

GENERAL INFORMATION

CCT




 3000K 4000K 5000K

Body Colour




Led

Seoul
Semiconductor

Material

Aluminium

CRI
≥90

IP 20

Adjustment

24°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0057
Wattage : 3 W
Beam : 38°
Size : 45*34 mm
Cutout : 40 mm

Product Code : DRL TD 0057
Wattage : 7 W
Beam : 38°
Size : 65*42mm
Cutout : 55 mm

Product Code : DRL TD 0057
Wattage : 12 W
Beam : 38°
Size : 82*54 mm
Cutout : 72 mm

Product Code : DRL TD 0057
Wattage : 18 W
Beam : 38°
Size : 100*80 mm
Cutout : 88 mm

GENERAL INFORMATION

CCT

3000K
 4000K
 5000K

Body Colour



Led

bridgelux®

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0058
Wattage : 3 W
Beam : 60°
Size : 66*22 mm
Cutout : 55 mm

Product Code : DRL TD 0058
Wattage : 7 W
Beam : 60°
Size : 85*32 mm
Cutout : 67 mm

Product Code : DRL TD 0058
Wattage : 12 W
Beam : 60°
Size : 107*34 mm
Cutout : 88 mm

Product Code : DRL TD 0058
Wattage : 18 W
Beam : 60°
Size : 128*40 mm
Cutout : 115 mm

GENERAL INFORMATION

CCT

3000K 4000K 6500K

Body Colour



Led

bridgelux®

Material

Aluminium



Adjustable

Tiltable

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0059
Wattage : 3 W
Beam : 38°
Size : 65*44 mm
Cutout : 57 mm

Product Code : DRL TD 0059
Wattage : 7 W
Beam : 38°
Size : 85*60 mm
Cutout : 70 mm

Product Code : DRL TD 0059
Wattage : 12 W
Beam : 38°
Size : 85*75 mm
Cutout : 70 mm

Product Code : DRL TD 0059
Wattage : 18 W
Beam : 38°
Size : 108*70 mm
Cutout : 92 mm

GENERAL INFORMATION

CCT

3000K 4000K

Body Colour



Led

bridgelux®

Material

Aluminium



Adjustable

Tiltable



Product Code : DRL TD 0060
Wattage : 3 W
Beam : 38°
Size : 65*43 mm
Cutout : 55 mm

Product Code : DRL TD 0060
Wattage : 7 W
Beam : 38°
Size : 85*60 mm
Cutout : 70 mm

Product Code : DRL TD 0060
Wattage : 12 W
Beam : 38°
Size : 85*70 mm
Cutout : 70 mm

Product Code : DRL TD 0060
Wattage : 18 W
Beam : 38°
Size : 108*70 mm
Cutout : 86 mm

GENERAL INFORMATION

CCT

3000K
 4000K
 6500K

Body Colour



Led

bridgelux®

Material

Aluminium



Adjustable

Tiltable

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0061
Wattage : 24 W
Beam : 38°
Size : 128*85 mm
Cutout : 112 mm

Product Code : DRL TD 0061
Wattage : 30 W
Beam : 38°
Size : 160*105 mm
Cutout : 140 mm

Product Code : DRL TD 0061
Wattage : 40 W
Beam : 38°
Size : 160*110 mm
Cutout : 140 mm

Product Code : DRL TD 0061
Wattage : 50 W
Beam : 38°
Size : 160*110 mm
Cutout : 140 mm

GENERAL INFORMATION

CCT

3000K
 4000K
 6500K

Body Colour



Led

bridgelux®

Material

Aluminium

CRI
≥80

IP 20

High Lumen

Adjustable

Tiltable

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0062
Wattage : 7 W
Beam : 38°
Size : 60*50 mm
Cutout : 52 mm

Product Code : DRL TD 0062
Wattage : 12 W
Beam : 38°
Size : 76*63 mm
Cutout : 65 mm

Product Code : DRL TD 0062
Wattage : 18 W
Beam : 38°
Size : 90*87 mm
Cutout : 80 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

CREE 

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0063
Wattage : 7 W
Beam : 38°
Size : 60*44 mm
Cutout : 52 mm

Product Code : DRL TD 0063
Wattage : 12 W
Beam : 38°
Size : 76*52 mm
Cutout : 65 mm

Product Code : DRL TD 0063
Wattage : 18 W
Beam : 38°
Size : 90*74 mm
Cutout : 80 mm

GENERAL INFORMATION

CCT

3000K 4000K

Body Colour



Led

CREE 

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0064
Wattage : 7 W
Beam : 38°
Size : 63*79 mm
Cutout : 55 mm

Product Code : DRL TD 0064
Wattage : 10 W
Beam : 38°
Size : 73*79 mm
Cutout : 65 mm

Product Code : DRL TD 0064
Wattage : 15 W
Beam : 38°
Size : 83*79 mm
Cutout : 75 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0065 White Matte Black
Wattage : 10 W
Beam : 38°
Size : 60*60 mm
Cutout : 55 mm



Product Code : DRL TD 0065 Gun Metal Brush
Gold Rose Gold
Wattage : 10 W
Beam : 38°
Size : 60*60 mm
Cutout : 55 mm



Product Code : DRL TD 0065 White Matte Black
Wattage : 15 W
Beam : 38°
Size : 80*60 mm
Cutout : 75 mm



Product Code : DRL TD 0065 Gun Metal Brush
Gold Rose Gold
Wattage : 15 W
Beam : 38°
Size : 80*60 mm
Cutout : 75 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0066 White Matte Black
Wattage : 10 W
Beam : 38°
Size : 60*60 mm
Cutout : 55 mm



Product Code : DRL TD 0066 Gun Metal Brush
Gold Rose Gold
Wattage : 10 W
Beam : 38°
Size : 60*60 mm
Cutout : 55 mm



Product Code : DRL TD 0066 White Matte Black
Wattage : 15 W
Beam : 38°
Size : 80*60 mm
Cutout : 75 mm



Product Code : DRL TD 0066 Gun Metal Brush
Gold Rose Gold
Wattage : 15 W
Beam : 38°
Size : 80*60 mm
Cutout : 75 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0067
Wattage : 12 W
Flux : 900 Lm
Beam : 20°-50°
Cutout : Ø58*209 mm

Product Code : DRL HC 0067
Wattage : 20 W
Flux : 1650 Lm
Beam : 15°-55°
Cutout : Ø74*259 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour



Led



Material

Aluminium

Ajustable

355° & 90°



Beam

18°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0068
Wattage : 7 W
Flux : 545/636 Lm
Size : Ø71.1*54 mm
Cutout : Ø65 mm

Product Code : DRL HC 0068
Wattage : 12 W
Flux : 1182/1377 Lm
Size : Ø71.1*76.5 mm
Cutout : Ø65 mm

Product Code : DRL HC 0068
Wattage : 18 W
Flux : 1848/2073 Lm
Size : Ø71.1*100 mm
Cutout : Ø65 mm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

bridgelux®

Material


Aluminium

Beam

40°

CRI
≥80

IP 20

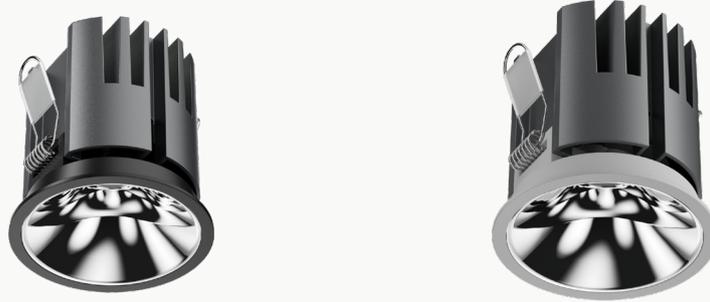

Product Code : DRL HC 0069
Wattage : 7 W
Flux : 545/636 Lm
Size : Ø71.1*54 mm
Cutout : Ø65 mm

Product Code : DRL HC 0069
Wattage : 12 W
Flux : 1182/1377 Lm
Size : Ø71.1*76.5 mm
Cutout : Ø65 mm

Product Code : DRL HC 0069
Wattage : 18 W
Flux : 1848/2073 Lm
Size : Ø71.1*100 mm
Cutout : Ø65 mm

GENERAL INFORMATION

CCT

3000K
 4000K
 6000K

Body Colour

Black
 White

Led

bridgelux®

Material

Aluminium

Beam

40°

CRI
≥80

IP 20

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0070
Wattage : 7/12 W
Flux : 500/880 Lm
Size : 90*70 mm
Cutout : Ø45mm



Product Code : DRL HC 0071
Wattage : 7/12 W
Flux : 500/880 Lm
Size : 96*70 mm
Cutout : Ø43mm



Product Code : DRL HC 0072
Wattage : 7/12 W
Flux : 500/880 Lm
Size : 90*70 mm
Cutout : Ø50mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour

Led



Material

Aluminium

CRI
≥90

IP 20

Beam

15/24/36/50°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0073
Wattage : 7/12 W
Flux : 500/880 Lm
Size : 90*70 mm
Cutout : Ø45mm



Product Code : DRL HC 0074
Wattage : 7/12 W
Flux : 500/880 Lm
Size : 96*70 mm
Cutout : Ø43mm



Product Code : DRL HC 0075
Wattage : 7/12 W
Flux : 500/880 Lm
Size : 90*70 mm
Cutout : Ø50mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour

Led



Material

Aluminium


CRI
≥90


IP 20

Beam

15/24/36/50°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0076
Wattage : 7/12W
Size : 90*103 mm
Cutout : Ø45 mm



Product Code : DRL HC 0077
Wattage : 7/12 W
Size : 90*103 mm
Cutout : Ø45 mm

GENERAL INFORMATION

CCT

3000K 4000K

Body Colour



Led

bridgelux®

Material

Aluminium + PC

CRI
≥90

IP 20

Beam

15/24/36/50°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0078
Wattage : 112W
Size : 90*100 mm
Cutout : Ø45 mm



Product Code : DRL HC 0079
Wattage : 12 W
Size : 96*100 mm
Cutout : Ø43 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour



Led



Material

Aluminium + PC

CRI
≥90

IP 20

Beam

15/24/36/50°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0092
Wattage : 10 W
Beam : 24°
Size : 53*97 mm
Cutout : 45 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0080
Wattage : 7 W
Flux : 630 Lm
Beam : 12/24/38°
Cutout : Ø60 mm

Product Code : DRL HC 0080
Wattage : 12 W
Flux : 1100 Lm
Beam : 12/24/38/50°
Cutout : Ø75 mm

Product Code : DRL HC 0080
Wattage : 20 W
Flux : 1800 Lm
Beam : 12/38/60°
Cutout : Ø95 mm

Product Code : DRL HC 0080
Wattage : 30W
Flux : 2700 Lm
Beam : 15/60°
Cutout : Ø115 mm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

bridgelux®

Material

Aluminium

Beam

40°





Product Code : DRL HC 0081
 Wattage : 7 W
 Flux : 650 Lm
 Size : Ø85*70 mm
 Cutout : Ø75 mm

Product Code : DRL HC 0081
 Wattage : 15 W
 Flux : 1650 Lm
 Size : Ø85*70 mm
 Cutout : Ø75 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium

Beam

24°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0082
 Wattage : 5 W
 Flux : 249/276 Lm
 Size : Ø61*79.5 mm
 Cutout : Ø55 mm



Product Code : DRL HC 0082
 Wattage : 12 W
 Flux : 896/905 Lm
 Size : Ø85*108 mm
 Cutout : Ø75 mm

GENERAL INFORMATION

CCT

 
 3000K 4000K

Body Colour



Led

CREE 

Material

Aluminium

Adjustable

355° & 30°



Beam

24°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0096
Wattage : 12 W
Beam : 38°
Size : 82*82*88 mm
Cutout : 75*75 mm



Product Code : DRL TD 0096
Wattage : 2X12 W
Beam : 38°
Size : 158*86*88 mm
Cutout : 158*75 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour

Led



Material

Aluminium

CRI
≥90

IP 20

High Lumen

Adjustable

360° Tilttable

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0097
Wattage : 8 W
Beam : 38°
Size : 63*63*51 mm
Cutout : 55*55 mm



Product Code : DRL TD 0097
Wattage : 12 W
Beam : 38°
Size : 85*85*59 mm
Cutout : 75*75 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0098
Wattage : 2X8 W
Beam : 38°
Size : 119*63*51 mm
Cutout : 110*55 mm



Product Code : DRL TD 0098
Wattage : 2X12 W
Beam : 38°
Size : 163*85*59 mm
Cutout : 150*75 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0083
Wattage : 3 W
Flux : 270 Lm
Size : Ø52*68 mm
Cutout : Ø44mm



Product Code : DRL HC 0083
Wattage : 3 W
Flux : 280 Lm
Size : 62*62*66 mm
Cutout : 58*57 mm



Product Code : DRL HC 0083
Wattage : 6 W
Flux : 560 Lm
Size : 115*62*66 mm
Cutout : 108*57mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour



Led

PHILIPS (3W)



Material

Aluminium

Adjustable

350° & 40°



Beam

35°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0083
Wattage : 9 W
Flux : 840 Lm
Size : 157*62*66 mm
Cutout : 150*57 mm



Product Code : DRL HC 0083
Wattage : 12 W
Flux : 1120Lm
Size : 208*62*66 mm
Cutout : 202*57 mm



Product Code : DRL HC 0083
Wattage : 15 W
Flux : 1400 Lm
Size : 251*62*66 mm
Cutout : 245*57mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour



Led

PHILIPS (3W)



Material

Aluminium

Adjustable

350° & 40°

CRI
≥80

IP 20

Beam

35°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

LAZER SPOT LIGHT



*These images are for presentation purpose only.



Product Code : DRL HC 0085
Wattage : 3 W
Flux : 224 Lm
Size : 44*55 mm
Cutout : 34.2*34.2 mm



Product Code : DRL HC 0085
Wattage : 6 W
Flux : 448 Lm
Size : 75*45 mm
Cutout : 34.2*64.4 mm



Product Code : DRL HC 0085
Wattage : 15 W
Flux : 1120 Lm
Size : 147*45 mm
Cutout : 37*140 mm



Product Code : DRL HC 0085
Wattage : 30 W
Flux : 2240 Lm
Size : 280*45 mm
Cutout : 37*273 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour



Led

TOYONIA

Material

Aluminium

Beam

30°




Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0086
Wattage : 6 W
Flux : 600 Lm
Size : 69*31*40 mm
Cutout : 65*27 mm



Product Code : DRL HC 0086
Wattage : 12 W
Flux : 1200 Lm
Size : 126*31*40 mm
Cutout : 122*27 mm

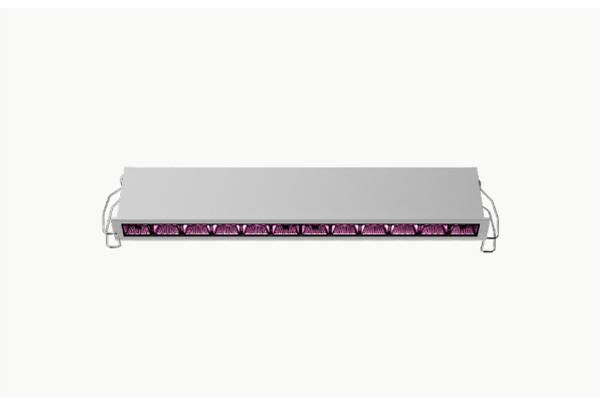

Product Code : DRL HC 0086
Wattage : 24 W
Flux : 2400 Lm
Size : 240*31*40 mm
Cutout : 236*27 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

OSRAM

Material

Aluminium

Beam

36°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0087
 Wattage : 12W
 Flux : 1200 Lm
 Size : 141*49*44 mm
 Cutout : 136*43mm



Product Code : DRL HC 0087
 Wattage : 24 W
 Flux : 2400 Lm
 Size : 255*49*44 mm
 Cutout : 250*43 mm

GENERAL INFORMATION

CCT

 
 3000K 4000K

Body Colour



Led

OSRAM

Material

Aluminium

Adjustable

20°



Beam

36°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0088
Wattage : 7.6 W
Beam : 25°
Size : 109*46*56 mm
Cutout : 100*38 mm



Product Code : DRL TD 0088
Wattage : 10 W
Beam : 25°
Size : 79*79*56 mm
Cutout : 100*38 mm



Product Code : DRL TD 0088
Wattage : 12.5 W
Beam : 25°
Size : 169*46*56 mm
Cutout : 160*38 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour

Led



Material

Aluminium

CRI
≥80

IP 20

High Lumen

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0089
Wattage : 7.6 W
Beam : 25°
Size : 109*46*52 mm
Cutout : 100*38 mm



Product Code : DRL TD 0089
Wattage : 10 W
Beam : 25°
Size : 79*79*52 mm
Cutout : 71*71 mm



Product Code : DRL TD 0089
Wattage : 12.5 W
Beam : 25°
Size : 169*46*52 mm
Cutout : 160*38 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour

Led



Material

Aluminium

CRI
≥80

IP 20

High
Lumen

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0090
Wattage : 10 W
Beam : 25°
Size : 85*56 mm
Cutout : 75 mm



Product Code : DRL TD 0091
Wattage : 10 W
Beam : 25°
Size : 82*52 mm
Cutout : 75 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour

Led



Material

Aluminium

CRI
≥80

IP 20

High
Lumen

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0093
Wattage : 5 W
Beam : 38°
Size : 55*55*45 mm
Cutout : 50*50 mm



Product Code : DRL TD 0094
Wattage : 12 W
Beam : 38°
Size : 130*55*45 mm
Cutout : 125*50 mm



Product Code : DRL TD 0094
Wattage : 16 W
Beam : 38°
Size : 93*93*45 mm
Cutout : 88*88 mm

GENERAL INFORMATION

CCT




 3000K 4000K 6000K

Body Colour




Led

CREE ⇄

Material

Aluminium

CRI
≥80

IP 20

High
Lumen

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0095
 Wattage : 20 W
 Beam : 38°
 Size : 205*55*45 mm
 Cutout : 200*50 mm



Product Code : DRL TD 0095
 Wattage : 36 W
 Beam : 38°
 Size : 130*130*45 mm
 Cutout : 125*12 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

CREE 

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

FRAME PROJECTOR LIGHT



*These images are for presentation purpose only.



Product Code : DRL HC 0099
 Wattage : 12W
 Flux : 900 Lm
 Beam : 20° - 50°
 Size : Ø50*209mm
 Cutout : Ø70mm



Product Code : DRL HC 0099
 Wattage : 20 W
 Flux : 1650 Lm
 Beam : 15° - 55°
 Size : Ø74*259mm
 Cutout : Ø70mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium

Adjustable

350° & 90°



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

LED DOWN LIGHT



*These images are for presentation purpose only.



Product Code : DRL HC 0100
Wattage : 12 W
Flux : 1020/1140 Lm
Size : Ø105*75 mm
Cutout : Ø95 mm

Product Code : DRL HC 0100
Wattage : 18 W
Flux : 1620/1926 Lm
Size : Ø140*85 mm
Cutout : Ø125 mm

Product Code : DRL HC 0100
Wattage : 27 W
Flux : 2430/2889 Lm
Size : Ø185*110 mm
Cutout : Ø165 mm

Product Code : DRL HC 0100
Wattage : 36 W
Flux : 3240/3852 Lm
Size : Ø225*115 mm
Cutout : Ø195 mm

GENERAL INFORMATION

CCT




 3000K 4000K 6000K

Body Colour




Led



LG

Material

Aluminium

Beam

100°





Product Code : DRL HC 0101
Wattage : 12 W
Flux : 1150 Lm
Size : Ø85*43 mm
Cutout : Ø75 mm

Product Code : DRL HC 0101
Wattage : 18 W
Flux : 1650 Lm
Size : Ø105*48 mm
Cutout : Ø95 mm

Product Code : DRL HC 0101
Wattage : 24 W
Flux : 2300 Lm
Size : Ø135*55.5 mm
Cutout : Ø125 mm

GENERAL INFORMATION

CCT

{2700-6500K}

Body Colour



Led



Material

Aluminium

Beam

110°





Product Code : DRL LRS 0117
Wattage : 7 W
Beam : 120°
Size : Ø 85*52 mm
Cutout : Ø 75 mm

Product Code : DRL LRS 0117
Wattage : 12 W
Beam : 120°
Size : Ø 100*59 mm
Cutout : Ø 85 mm

Product Code : DRL LRS 0117
Wattage : 18 W
Beam : 120°
Size : Ø 126*67 mm
Cutout : Ø 105 mm

GENERAL INFORMATION

CCT

3000K
 4000K
 6000K

Body Colour

Led

bridgelux®

Material

Aluminium

CRI
≥80

IP 54

High
Lumen

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL LRS 0102
Wattage : 12 W
Size : Ø91*H45mm
Cutout : Ø80mm

Product Code : DRL LRS 0102
Wattage : 18 W
Size : Ø105*H53mm
Cutout : Ø92 mm

Product Code : DRL LRS 0102
Wattage : 27 W
Size : Ø128*H67mm
Cutout : Ø115 mm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour



Beam

120°





Product Code : DRL HC 0103
Wattage : 12 W
Beam : 110°
Cutout : Ø75 mm

Product Code : DRL HC 0103
Wattage : 18 W
Beam : 110°
Cutout : Ø105 mm

Product Code : DRL HC 0103
Wattage : 24 W
Beam : 110°
Cutout : Ø155 mm

Product Code : DRL HC 0103
Wattage : 35 W
Beam : 110°
Cutout : Ø205 mm

Product Code : DRL HC 0103
Wattage : 48 W
Beam : 110°
Cutout : Ø285 mm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

bridgelux®

Material

Aluminium

CRI
≥80

IP 20

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

LED SURFACE LIGHT




*These images are for presentation purpose only.



Product Code : DRL HC 0104
Wattage : 8 W
Flux : 172-226 Lm
Size : Ø45*253 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

CITIZEN

Material

Aluminium

Ajustable

355° & 80°



Beam

15°-30°



Product Code : DRL HC 0105
Wattage : 12 W
Flux : 706/784 Lm
Size : 105*38*163 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

CITIZEN

Material

Aluminium

Ajustable

355° & 90°



Beam

18°

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0106
Wattage : 8 W
Beam : 35°
Flux : 508/559 Lm
Size : Ø65*45 mm

Product Code : DRL HC 0106
Wattage : 15 W
Beam : 35°
Flux : 975/1024 Lm
Size : Ø80*45 mm

Product Code : DRL HC 0106
Wattage : 20 W
Beam : 30°
Flux : 1530/1607 Lm
Size : Ø95*55 mm

Product Code : DRL HC 0106
Wattage : 30 W
Beam : 50°
Flux : 2419/2540 Lm
Size : Ø120*62 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

LUMENS

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0107
Wattage : 12 W
Flux : 575-755 Lm
Size : Ø65*161 mm

Product Code : DRL HC 0107
Wattage : 18 W
Flux : 790-940 Lm
Size : Ø80*228 mm

Product Code : DRL HC 0107
Wattage : 25 W
Flux : 900-1340 Lm
Size : Ø90*255 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led



Material

Aluminium





Product Code : DRL TD 0108
Wattage : 12 W
Beam : 38°
Size : 73*73 mm

Product Code : DRL TD 0108
Wattage : 20 W
Beam : 38°
Size : 95*95*110 mm

Product Code : DRL TD 0108
Wattage : 30 W
Beam : 38°
Size : 115*115*125 mm

GENERAL INFORMATION

CCT



3000K 4000K

Body Colour



Led

bridgelux®

Material

Aluminium



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0109
Wattage : 7 W
Beam : 38°
Size : 52*75 mm

Product Code : DRL TD 0109
Wattage : 12 W
Beam : 38°
Size : 73*100 mm

Product Code : DRL TD 0109
Wattage : 20 W
Beam : 38°
Size : 94*116 mm

Product Code : DRL TD 0109
Wattage : 30 W
Beam : 38°
Size : 115*125 mm

GENERAL INFORMATION

CCT

 
3000K 4000K

Body Colour

Led



Material

Aluminium

CRI
≥80

IP 20

High
Lumen

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL TD 0110
Wattage : 7 W
Beam : 36°
Cutout : Ø61*70 mm
Flux : 560 Lm

Product Code : DRL TD 0110
Wattage : 12 W
Beam : 36°
Cutout : Ø80*81 mm
Flux : 960 Lm

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Body Colour

Led

bridgelux®

Material

Aluminium

CRI
≥80

IP 20

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : DRL HC 0110
 Wattage : 7W
 Cutout : Ø68 mm
 Beam : 10° | 20° | 30°
 Flux : 315 Lm

Product Code : DRL HC 0110
 Wattage : 10W
 Cutout : Ø89 mm
 Beam : 10° | 20° | 30°
 Flux : 400 Lm

GENERAL INFORMATION

CCT




 3000K 4000K 5000K

Body Colour




Led

Seoul
Semiconductor

Material

Aluminium

CRI
≥90

IP 20

Adjustment

15° & 360°



Product Code : DRL LRS 0112
Wattage : 12 W
Cutout : Ø25 mm
Size : Ø65*170 mm
Finish : WH + BK



Product Code : DRL LRS 0112
Wattage : 12 W
Cutout : Ø25 mm
Size : Ø65*170 mm
Finish : BK + BK



Product Code : DRL LRS 0112
Wattage : 12 W
Cutout : Ø25 mm
Size : Ø65*170 mm
Finish : BK + ROSE GOLD

GENERAL INFORMATION

CCT

 
3000K 4000K

Led



Material

Aluminium

Beam

38°



Product Code : DRL LRS 0113
Wattage : 10 W
Cutout : Ø25 mm
Size : Ø58*100 mm
Finish : WH + WH

Product Code : DRL LRS 0113
Wattage : 10 W
Cutout : Ø25 mm
Size : Ø58*100 mm
Finish : BK + BK

Product Code : DRL LRS 0113
Wattage : 20 W
Cutout : Ø25 mm
Size : Ø73*135 mm
Finish : WH + WH

Product Code : DRL LRS 0113
Wattage : 20 W
Cutout : Ø25 mm
Size : Ø73*135 mm
Finish : BK + BK

Product Code : DRL LRS 0113
Wattage : 30 W
Cutout : Ø25 mm
Size : Ø93*158 mm
Finish : WH + WH

Product Code : DRL LRS 0113
Wattage : 30 W
Cutout : Ø25 mm
Size : Ø93*158 mm
Finish : BK + BK

GENERAL INFORMATION

CCT

 
3000K 4000K

Led



Material

Aluminium

Beam

38°



Product Code : DRL HC 0114
Wattage : 7 W
Beam : 24°
Flux : 557 Lm



Product Code : DRL HC 0114
Wattage : 2* 7 W
Beam : 24°
Flux : 1114 Lm

GENERAL INFORMATION

CCT

  
3000K 4000K 6000K

Body Colour



Led

Seoul
Semiconductor

Material

Aluminium

CRI
≥90

IP 20

Adjustment

24°


Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

LINEAR HANGING LIGHTS





Product Code : DRL HC 3013
Wattage : 38 W
Size : 38*75*1200 mm
Beam : 48°
Flux : 2918 Lm

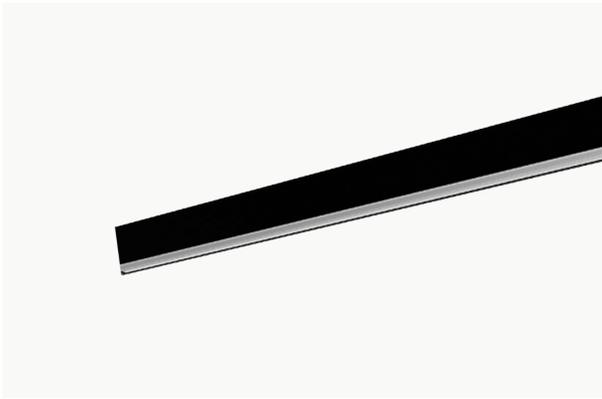

Product Code : DRL HC 3014
Wattage : 48 W
Size : 60*75*1200 mm
Beam : 80°
Flux : 4143 Lm



Product Code : DRL HC 3015
Wattage : 38 W
Size : 35*75*1200 mm
Beam : 60°
Flux : 4022 Lm

GENERAL INFORMATION

CCT




 3000K 4000K 5000K

Body Colour




Led

OSRAM

Material



Aluminium

CRI
≥90

IP 20

Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

LED STRIP AND FLEXIBLE LIGHT

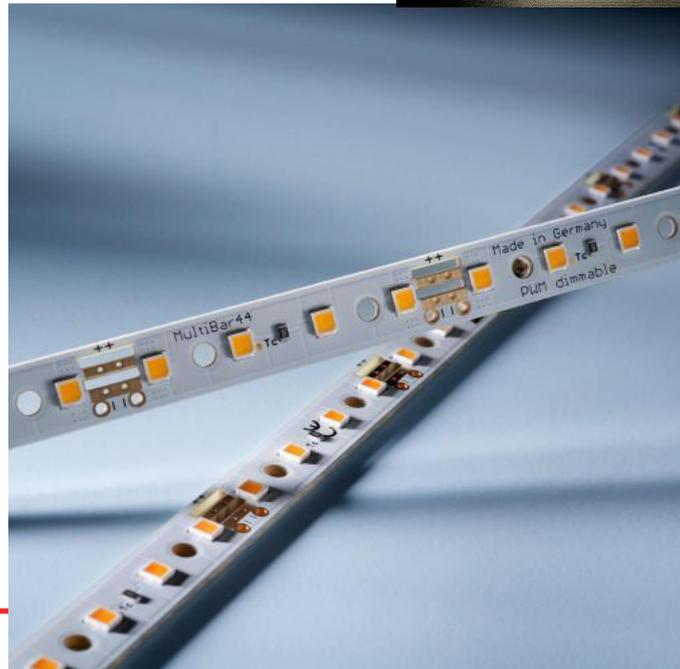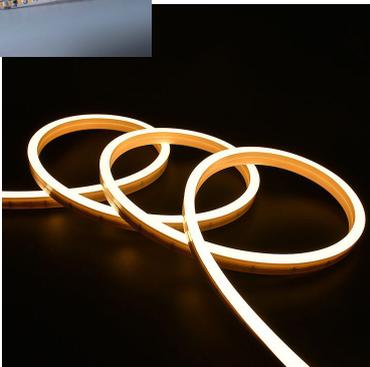



Product Code : 2835 LED STRIP
Wattage : 6 W
Power : 6 W/m
Size : 8 mm
LED : 60/mtr

Product Code : 2835 LED STRIP
Wattage : 12 W
Power : 12 W/m
Size : 8 mm
LED : 120/mtr

Product Code : 2835 LED STRIP
Wattage : 18 W
Power : 18 W/m
Size : 10 mm
LED : 180/mtr

Product Code : 2835 LED STRIP
Wattage : 24 W
Power: 24 W/m
Size : 10 mm
LED : 240/mtr

GENERAL INFORMATION

CCT

2700K 3000K 3500K 4000K
5000K 6000K 6500K

SDCM

3

Voltage

24V DC

Packing Roll

10 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : S1616 LED STRIP
Wattage : 6 W
Power : 6 W/m
Size : 3 mm
LED : 120/mtr

Product Code : S1616 LED STRIP
Wattage : 12 W
Power : 12 W/m
Size : 8 mm
LED : 120/mtr

Product Code : SMD 2835
Wattage : 5 W
Power : 18 W/m
Size : 5 mm
LED : 180/mtr

Product Code : SMD 2835
Wattage : 11 W
Power: 24 W/m
Size : 5 mm
LED : 240/mtr

GENERAL INFORMATION

CCT

2700K 3500K 5000K

SDCM

3

Voltage

24V DC

Packing Roll

10 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : S-2835 LED STRIP
 Wattage : 10 W
 Power : 10W/m
 Size : 10mm
 LED : 120/mtr

GENERAL INFORMATION

CCT

3000K 4000K 6500K

SDCM

3

Voltage

24V DC

Packing Roll

120 Mtr.



(No Voltage Drop)

Also available with - **Triac/Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : SMD 5050
Wattage : 24 W
Power : 24 W/m
Size : 12 mm
LED : 60/mtr

GENERAL INFORMATION

CCT

RGB + Tunable White

Voltage

24V DC

Packing Roll

10 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : S-2835 LED STRIP
 Wattage : 16 W
 Power : 16 W/m
 Size : 5 mm
 LED : 120/mtr

Product Code : SMD 2835
 Wattage : 18 W
 Power : 18 W/m
 Size : 8 mm
 LED : 192/mtr

GENERAL INFORMATION

CCT

Tunable White

SDCM

3

Voltage


24V DC

Packing Roll

10 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

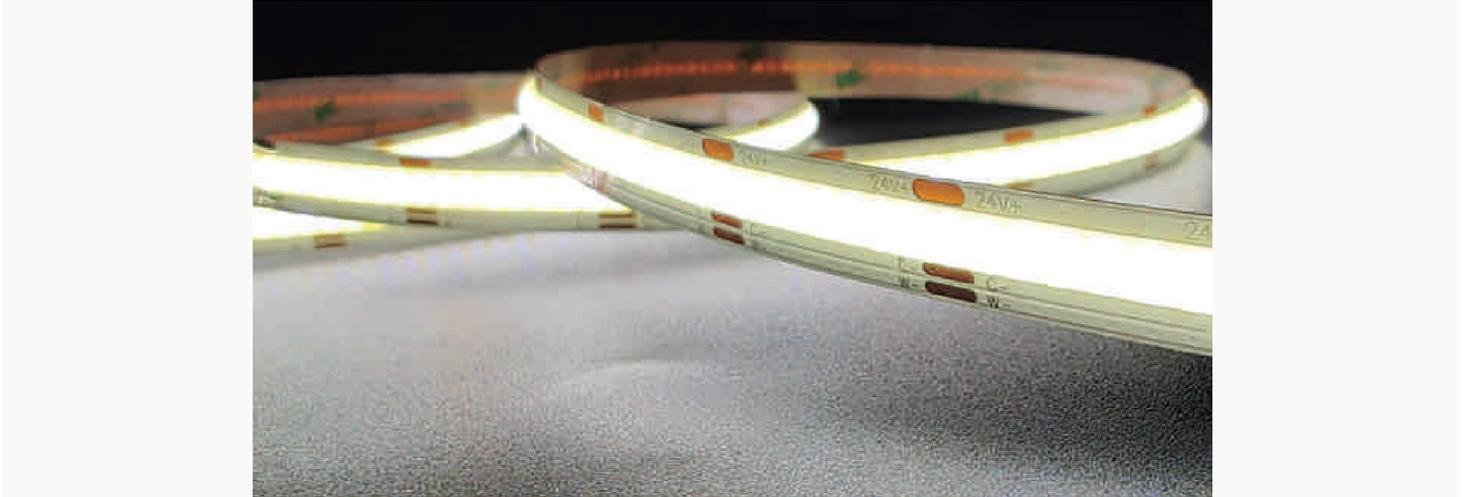

Product Code : COB LED STRIP
 Wattage : 10 W
 Power : 10 W/m
 Size : 5 mm
 LED : 320/mtr

Product Code : COB LED STRIP
 Wattage : 12 W
 Power : 12 W/m
 Size : 8 mm
 LED : 480/mtr

GENERAL INFORMATION

CCT

3000K 4000K 6500K

Voltage


24V DC

Packing Roll

10 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

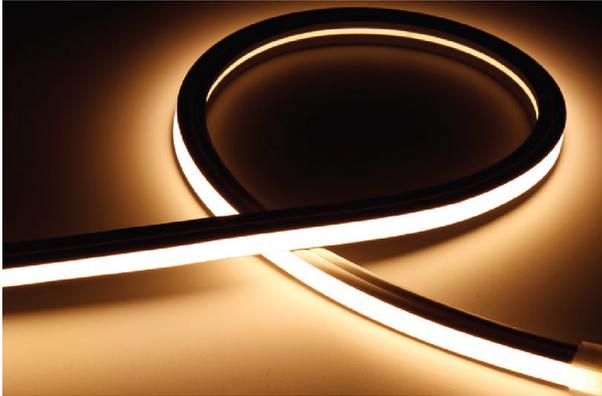

Product Code : 5050 NEON STRIP
Wattage : 24 W
Power : 24 W/m
Size : 20 x 20 mm
LED : 60/mtr
CCT : RGB + Tunable White



Product Code : 2835 NEON STRIP
Wattage : 12 W
Power : 12 W/m
Size : 16 x 6 mm
LED : 120/mtr
CCT : 3000K



Product Code : NEON FLEX
Wattage : 10 W
Power : 10 W/m
Size : 12 x 12 mm
LED : 120/mtr
CCT : 3000K & 4000K

GENERAL INFORMATION

Voltage

24V DC

Packing Roll

10 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : SMD 2835
Wattage : 12 W
Power : 12 W/m
Size : 8 mm
LED : 60/mtr
CCT : 3000K & 4000K



Product Code : SMD 2835
Wattage : 12 W
Power : 8 W/m
Size : 8 mm
LED : 120/mtr
CCT : 3000K

GENERAL INFORMATION

Voltage

24V DC

Packing Roll

5 Mtr. & 10 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : SMD 2110
Wattage : 10 W
Power : 10 W/m
Size : 8 mm
LED : 140/mtr



Product Code : SMD 2110
Wattage : 20 W
Power : 20 W/m
Size : 8 mm
LED : 280/mtr



Product Code : SMD 2110
Wattage : 30 W
Power : 30 W/m
Size : 8 mm
LED : 350/mtr

GENERAL INFORMATION

CCT

3000K 4000K 6000K

Voltage

24V DC

Packing Roll

5 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**




Product Code : SMD 2835
Wattage : 24 W
Power : 24 W/m
Size : 20 x 10 mm
LED : 180/mtr

GENERAL INFORMATION

CCT	Voltage	Packing Roll
2700K	24V DC	5 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**

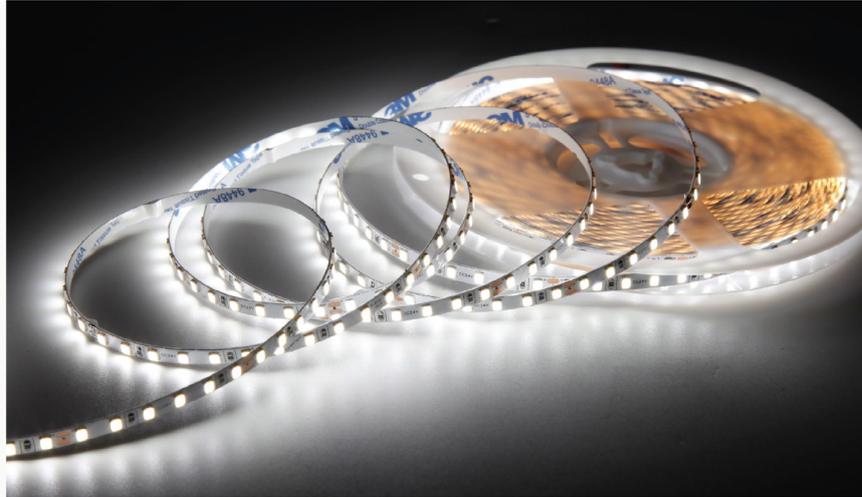

Product Code : SMD 2835
Wattage : 12 W
Power : 12 W/m
Size : 5 mm
LED : 120/mtr

GENERAL INFORMATION

CCT	Voltage	Packing Roll
3000K 4000K	12V DC	5 Mtr.



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : SMD 2835
 Wattage : 6 W
 Power : 6 W/m
 LED : 60/mtr
 CCT : 3000K, 4000K, 6000K
 Red | Green | Blue | Amber | Purple

Product Code : SMD 2835
 Wattage : 12 W
 Power : 12 W/m
 LED : 120/mtr
 CCT : 3000K, 4000K, 6000K

Product Code : SMD 2835
 Wattage : 18 W
 Power : 18 W/m
 LED : 180/mtr
 CCT : 3000K, 4000K, 6000K

Product Code : SMD 2835
 Wattage : 24 W
 Power : 24 W/m
 LED : 180/mtr
 CCT : 3000K, 4000K, 6000K

GENERAL INFORMATION

Voltage

12V DC

Packing Roll

5 Mtr.

Size

8mm & 10 mm



Also available with - **Triac/ Phasecut/ 0-10v/ Dali-Dimmable Drivers**



Product Code : SED 101 - 24W
Power : 24 W
Volt : 12V/2A

Product Code : SED 102-36W
Power : 36 W
Volt : 12V/3A

Product Code : SED 103-60 W
Power : 60 W
Volt : 12V/5 A

Product Code : SED 104-100 W
Power : 100 W
Volt : 12V/8.3 A

Product Code : SED 105-120 W
Power : 120 W
Volt : 12V/10 A

Product Code : SED 106-150 W
Power : 150 W
Volt : 12V/12.5 A

Product Code : SED 107-200 W
Power : 200 W
Volt : 12V/16.5 A

Product Code : SED 108-300 W
Power : 300 W
Volt : 12V/25 A

Product Code : SED 109-400 W
Power : 400W
Volt : 12V/33.3 A

Product Code : SED 203-60 W
Power : 60 W
Volt : 24V/2.5 A

Product Code : SED 205-120 W
Power : 120 W
Volt : 24V/5 A

Product Code : SED 206-192 W
Power : 192 W
Volt : 24V/8 A

Product Code : SED 207-240 W
Power : 240 W
Volt : 24V/10 A

Product Code : SED 208-384 W
Power : 384 W
Volt : 24V/16 A

Knowledge of Lights

Lumen (Unit: lm)

Lumen is the standard unit for measuring luminous flux, indicating the total quantity of visible light emitted by a source. It reflects the overall brightness of the luminaire.

Beam Angle (Unit: degrees)

Beam angle defines the spread of light emitted from a source. It's the angle where luminous intensity drops to 50% of its peak, determining how narrow or wide the light beam will appear.

Colour Temperature (Unit: Kelvin)

Measured in Kelvin (K), color temperature defines the appearance of the light emitted—ranging from warm (yellowish) to cool (bluish) tones. It's based on the temperature of a black-body radiator that emits light of a similar color.

Lux (Unit: lx)

Lux quantifies the amount of light hitting a surface. One lux equals one lumen per square meter, providing a direct measure of illumination intensity in a space.

Driver

A driver is the essential electronic component that regulates and supplies the correct power to LED light sources, ensuring consistent performance and safety.

Light Emitting Diode (LED)

An LED is a semiconductor device that transforms electrical energy into visible light, offering energy efficiency, longevity, and superior performance.

Colour Rendering Index (CRI)

CRI measures a light source's ability to reveal the true colors of objects in comparison to natural light. Rated on a scale of 0 to 100, higher CRI ensures more accurate color representation.

Kelvin

Kelvin is the unit used to describe color temperature, helping to distinguish between warm, neutral, and cool tones in lighting environments.

Tunable & Dimmable LED

LEDs from DORO are fully dimmable and tunable, enhancing ambiance while improving energy efficiency. Dimming methods include

- A. Triac/Phase Cut (Leading or Trailing Edge)
- B. 1-10V DC Analog Dimming
- C. DSI (Digital Signal Interface)
- D. DALI (Digital Addressable Lighting Interface)

IES Files

IES files, developed by the Illuminating Engineering Society (IESNA), provide standardized photometric data. Lighting designers use these files to simulate real-world lighting performance in professional design software.

LED Driver

DORO Lights incorporates top-tier drivers from Fulham/Eaglerise/Osram/Philips – renowned global manufacturers. These constant-current drivers ensure optimal power delivery and come with a 2-year warranty.

COB (Chip-On-Board) LED

COB technology mounts multiple LED chips directly onto a substrate to form a single module. This design reduces thermal resistance and improves light output and heat management.

Design Adaptability

DORO embraces modular design to stay ahead in a fast-evolving LED industry. Future-proofing ensures seamless upgrades to next-generation modules without overhauling fixture designs.

Colour Consistency in LEDs

DORO ensures consistent light quality through LED binning and MacAdam step classification. Each LED is categorized based on color, brightness, and voltage, maintaining uniform appearance across installations.

Heat Management

Proper thermal design is critical to LED performance. DORO fixtures incorporate high-grade heat sinks that dissipate heat efficiently, extending the life and reliability of the LEDs.

Dimming Control Protocols

Flickering often arises from mismatched drivers and control systems. At DORO, we ensure compatibility between our LEDs and drivers to deliver stable, flicker-free lighting performance.

Why Lumens Matter More Than Watts

In LED technology, lumen output is the true measure of performance – not wattage. As efficiency improves, newer LEDs produce significantly more lumens per watt, making wattage a less relevant metric.

Suggestive Lux Level

Area	Lux
Offices – conference rooms	750
Shops	
Super markets	500
Show rooms – Car & General	500
Schools – Classrooms	500
Multi-Purpose Sports Hall	
Tabel Tennis, Gymnasium, Squash	500
Hospitals	
General	300
Examination	1000
Corridors General	150
Reception / Enquiry	300
Homes	
Living Rooms	
- Casual Rooms	150
-Desk and Prolonged Reading	300
Hotels	
Reception/Cashiers/Lobby	300
Coffee Bar/Restaurants	150

IP Protection Codes

The IP prefix followed by two significant digits indicates the fixture's resistance to the penetration of solids and liquids safety rating (IEC 259 issue) 1st digit: against the penetration of solid body and contact with live components. 2nd digit against penetration by liquids.

IP20	Protection against ingress of solids objects of $\varnothing \geq 12\text{mm}$. No protection against water.
IP40	Protection against ingress of solids objects of $\varnothing \geq 1\text{mm}$. No protection against water.
IP43 	Protection against ingress of solids objects of $\varnothing \geq 1\text{mm}$ and against falling rain.
IP44 	Protection against ingress of solids objects of $\varnothing \geq 1\text{mm}$ and against water splashes from all sides.
IP54  	Protection against ingress of dust and water splashes from all sides.
IP55  	Protection against ingress of dust and jets of water from all directions.
IP64  	Protection against ingress of dust and water splashes from all directions.
IP65   	Protection against ingress of dust and jets of water from all directions.
IP67  	Dust-tight and protected against the effects of temporary immersion.
IP68  	Water splashed against the enclosure from any direction shall have no harmful effect.



Doro Lighting Solutions 

Doro lighting solutions 

Doro lighting solutions 

www.dorolightingsolutions.com 